



TOASTERS HIGH-PERFORMANCE

CONTACT & CONVEYOR MODELS

Built to stand up to the most rigorous foodservice operations

Fast, consistent heating that meets your toasting needs
on demand with our wide variety of toasting options




QCS3-1600B

TOASTERS BUYING GUIDE

HOW WILL YOU USE YOUR TOASTER?

- **BATCH PROCESS** - low volume & irregular
- **CONTINUOUS OPERATION** - high volume & ongoing

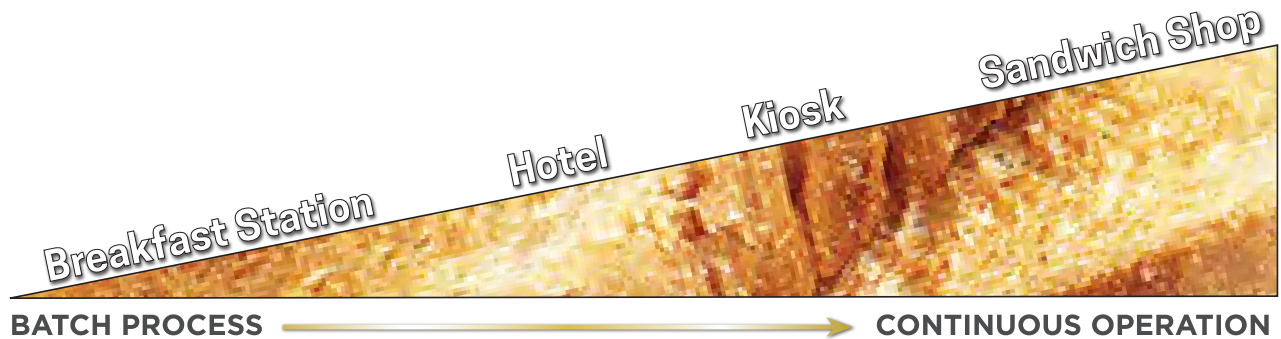

WHAT ARE YOU TOASTING?

OPENING SIZE PER PRODUCT		
BREAD 1.5"	BAGELS 1.75"	BUNS 3.0"

Buns, bagels, and breads **all have varying heights**

Consider the height of your product when selecting the right toaster style



SCT4000E VERTICAL CONTACT TOASTER

- First buns pass-through time is as low as 12 seconds fully caramelized
- Bun height adjustment controlled with an easily adjusted twist knob
- Supplied with an easy-to-install non-stick sheet
- Single piece front and rear silicone belts
- High-contrast display allows an infinite number of programmed product settings
- USB port programming allows easy uploading of new product files consistently, across any number of toasters

CAPABLE OF UP TO



**1,800
BUN-HALVES
PER HOUR**



two heels & two crowns
at once, constant feed



SCT4000E


HOLMAN SCT4000E VERTICAL CONTACT TOASTER

Model No.	Description	CAPACITY per HOUR	Volts ¹	NEMA Plug	Watts	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
SCT4000E	PROGRAMMABLE CONTROLS VARIABLE SPEED & TEMPERATURE CONTROL, DIGITAL STEPPER MOTOR	1,800 bun halves	208/240 230	6-15P CEE7/7	2,000/2,663 2,446	21.70	9.50	25.70	100	85

ACCESSORIES

Model No.	List	Description
SCTBWP	\$2,393	PERFORATED BUTTER WHEEL for SCT
SCTBWS	\$1,723	SMOOTH BUTTER WHEEL for SCT
SCTSHEET-B	\$1,232	(10) NON-STICK SHEETS for SCT, BUTTER APPLICATIONS

non-stick sheet
for SCT4000E

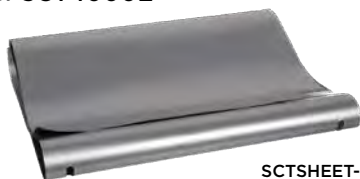

SCTSHEET-B



HCT HORIZONTAL CONTACT TOASTERS

- Caramelize/seal buns & bread to extend holding time
- Durable Chain or non-marking Silicone belt options
- Analog and Electronic Control Options
- Knob adjustment for product height
- Low-profile design



⚡ HOLMAN HCT HORIZONTAL CONTACT TOASTERS

Model No.	Belt Type	Voltage		Model No.	Belt Type	Voltage ¹	
ANALOG CONTROLS				ELECTRONIC CONTROLS			
HCT13M	Metal Chain	208		HCTE13M	Metal Chain	208	
HCT13M-240		240					
HCT13M-230		230					
HCT13S	Silicone	208		HCTE13S	Silicone	208	
HCT13S-240		240					
HCT13S-230		230					

HCT model specs on table below. 1-240 & 230V not available on HCTE13M & HCTE13S Electronic control models

SPECIFICATIONS - HCT CONTACT TOASTERS

Model	BUN HALVES per HOUR	Volts ¹	NEMA Plug	Watts	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
HCT13M HCTE13M	1700	208	6-20P	2800	19.25	24.40	17.30	115	85
		240	6-20P	3000					
		230	CEE7/7	2750					
HCT13S HCTE13S		208	6-20P	2550	19.25	24.40	17.30	115	85
	240	6-20P	2650						
	230	CEE7/7	2450						

1-240V & 230V not available on HCTE13M & HCTE13S Elec.Control models

ACCESSORIES

Model No.	Description
HCTEBW	BUTTER WHEEL for HCT
HCTFEED	FEEDER TRAY for HCT
CTSHEET10	(10) NON-STICK SHEETS for HCT



Compact, only 14½ inches wide **MAXIMUM PERFORMANCE**
MINIMUM COUNTER SPACE

HOLMAN QCS1 COMPACT CONVEYOR TOASTERS

QCS1 toasters

- Optimal performance in a compact size
- 10" w belt for up to 2-slices/bread, side-by-side
- Analog temperature & belt speed adjustment
- Bagel toaster heats max power on 1-side
- 120V service for use anywhere in your kitchen



⚡ HOLMAN QCS1 COMPACT CONVEYOR TOASTERS

ANALOG CONTROLS ¹		Slices per HOUR	Description	Volts	Watts	NEMA Plug	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
QCS1-350		350	1.5" Opening COMPACT toaster	120	1600	5-15P	14.25	18.88	13.25	44	85
QCS1-500B		500	1.5" Opening BAGEL toaster	120	1600	5-15P	14.25	18.88	13.25	44	85

All prices F.O.B Smithville, TN

HOLMAN QCS2 COMPACT CONVEYOR TOASTERS

QCS2 toasters

- 10" w belt for up to 2-slices/bread, side by side
- Analog controls for belt speed, top and bottom heat
- Analog temperature & belt speed adjustment
- Programmable belt speed & top and bottom heat
- Inlet height options for toast, bagels, and buns



⚡ HOLMAN QCS2 CONVEYOR TOASTERS



ANALOG CONTROLS			Slices per HOUR	Description	Volts ¹	Watts	NEMA Plug	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
QCS2-500				1.5" Opening COMPACT toaster	120	1,700	5-15P	14.50	22.38	15.63	64	85
QCS2-600H				3.0" Opening BUN toaster	208 240*	2,800	6-20P 6-20P	14.50	22.38	15.63	64	85
QCS2-800			800	1.5" Opening COMPACT toaster	208 240	2,800	6-20P 6-20P	14.50	22.38	15.63	64	85
QCS2-1200B			1,200	1.75" Opening BAGEL toaster	208	3,200	6-20P	14.50	22.38	15.63	64	85

All prices F.O.B Smithville, TN 1 - Specify 120V, 208V, 240V when ordering * 240V not available on QCSe2-600H model



model with **ELECTRONIC CONTROLS**
QCSe2-600H



HOLMAN QCS3 HIGH-VOLUME CONVEYOR TOASTERS



QCS3-950H



QCS3 -1600B

QCS3 toasters

- 14" wide belt for up to 3-slices of bread, side by side
- Analog controls for belt speed, top and bottom heat
- Programmable belt speed and top and bottom heat
- Inlet height options for toast, bagels, and buns

⚡ HOLMAN QCS3 HIGH VOLUME CONVEYOR TOASTERS

ANALOG CONTROLS		Slices per HOUR	Description	Volts ¹	Watts ¹	NEMA Plug	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
QCS3-1000		1,000	1.5" Opening COMPACT toaster	208	3,200	6-20P	18.50	22.38	15.63	68	85
QCS3-950H		950	3.0" Opening BUN toaster	208 240	3,200	6-20P 6-20P	18.50	22.38	15.63	68	85
QCS3-1300		1,300	1.5" Opening COMPACT toaster	208	3,600	6-30P	18.50	22.38	15.63	68	85
QCS3-1600B		1,600	2.0" Opening BAGEL toaster	208	3,400	6-30P	18.50	22.38	15.63	68	85
				1 - Specify 208V or 240V							



HOLMAN DT14 & QCS3 SPECIALTY CONVEYOR TOASTERS

⚡ HOLMAN SPECIALTY CONVEYOR TOASTERS



QCS3-1400BH



DT14

ANALOG CONTROLS		Slices per HOUR	Description	Volts ¹	Watts	NEMA Plug	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class	BELT Width & Capacity
DT14		2,000	2.25" Top Opening 1.75" Bottom Opening DOUBLE CONVEYOR toaster	208 240	4,800	6-30P	19.50	23.43	24.06	102	85	14" 3 Slices
QCS3-1400BH		1,400	3.0" Opening VARIABLE BAGEL & BREAD toaster	208 240	3,400	6-30P 6-30P	18.50	22.38	15.63	68	85	14" 3 Slices
All prices F.O.B Smithville, TN				1 - Specify 120V, 208V, or 240V Service when ordering. All units rated for 50-60Hz cycles.								

DT14 TOASTER

"The Double Toaster"

two conveyor belts, high production toasting!

The DT14 Double Toaster defines productivity. Two variable speed conveyor belt controls and top/bottom heat controls for perfect color and texture on everything. Product entry opening adjustable from 1" to 2.25" high in top toaster. Bottom entry is 1.75".



adjustable
1" - 2 1/4" high
product
OPENING

1 3/4" high
product
OPENING

DT14

QCS3-1400BH TOASTER

"The Variable Toaster" two units in one, two ways to toast!

switch from bread (2-sided toasting) to **bagels** (1-sided toasting)

The QCS3-1400BH toaster takes production flexibility to a whole new level with the extra-wide 3" inlet. Normal operation, 3400W of power is applied evenly between top and bottom, like a standard toaster. A toggle switch in the lower left corner converts the unit to 3400W of TOP HEAT ONLY, for maximum bagel and bun productivity.



QCS3-1400BH

two-sided
toasting
BREAD ↔ switch from ↔ one-sided
toasting
BAGEL & BUN



ULTRA-MAX IMPINGEMENT CONVEYOR OVENS

Impingement Conveyor Ovens are great for...

- Toasting sandwiches, baking cookies & cinamon rolls
- Baking smaller blanched or par-baked pizzas
- High-volume, varied menu applications
- High power applications



UltraMax



STAR ULTRA-MAX GAS IMPINGEMENT CONVEYOR OVENS - DIGITAL CONTROLS

Model No.	Smithville, TN	BTU ¹	Volts ²	NEMA Plug	Chamber [in.]	Belt Width [in.]	Belt Length [in.]	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
UM1854		40,000	120	5-15P	28	18.9	54	60.60	39.30	23.30	352	25
1 - Specify Natural Gas or Propane when ordering												
Gas Conveyor ovens can be stacked two (2) high				FREE START-UP for this product through approved service agent								



STAR ULTRA-MAX ELECTRIC IMPINGEMENT CONVEYOR OVENS - DIGITAL CONTROLS

ELECTRIC CONVEYOR OVENS
CAN BE STACKED 2-HIGH

Model No. Stainless Belt	Smithville TN	Model No. PTFE Coated Belt	Price F.O.B. Smithville, TN	Volts ¹	NEMA Plug	Watts	Chamber [in.]	Belt Width [in.]	Belt Length [in.]	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
UM1833A		-	-	208 240	6-30P 6-30P	6,400	24	18.9	33	37.20	30.40	20.00	272	85
UM1850A		UM1850A		208 240	6-30P 6-30P	6,400	24	18.9	50	50.00	30.40	20.00	290	85
1 - Specify 208V or 240V Service														
Electric Conveyor ovens can be stacked two (2) high							FREE START-UP for this product through approved service agent							

ACCESSORIES

Model No.	Description	Ship Wt. [lb.]	Freight Class
UMENTRY6	6" CONVEYOR ENTRY SHELF	3	85
UMEXIT8	8" CONVEYOR EXIT SHELF	4	85
UMEXIT11	11" CONVEYOR EXIT SHELF	3	85
ES-UM1854	EQUIPMENT STAND UM1854	50	85



HOLMAN QUARTZ HEATER CONVEYOR OVENS



Quartz Conveyor Ovens are great for...

- Toasting sandwiches, baking cookies & cinamon rolls
- Baking smaller blanched or par-baked pizzas
- Countertop applications, limited space
- Lower power or low-voltage applications

HOLMAN QUARTZ HEATER ELECTRIC CONVEYOR OVENS - ANALOG CONTROLS

ELECTRIC CONVEYOR OVENS CAN BE STACKED 2-HIGH

Model No.	Volts ¹	Watts	NEMA Plug	Chamber [in.]	Belt Width [in.]	Belt Length [in.]	Width [in.]	Depth [in.]	Height [in.]	Ship Wt. [lb.]	Freight Class
210HX	120 208 220	1,700 2,800 2,800	5-15P 6-20P 6-20P	17	10.0	31	31.00	15.44	14.00	60	85
214HX	208 240 220	4,000	6-30P 6-30P Field Wired	17	14.0	31	31.00	19.44	14.00	66	85
314HX	208 220	5,400	6-30P Field Wired	21.5	14.0	38	38.69	21.25	16.13	115	85

1 - Specify 120, 208V, 240V or 220V service when ordering. All units rated for 50-60Hz cycles.

Electric Conveyor ovens can be stacked two (2) high

ACCESSORIES

Model No.	Description	Ship Wt. [lb.]	Freight Class
SSK-210HX	210HX STACKING KIT	22	85
SSK-214HX	214HX STACKING KIT	24	85
SSK-314HX	314HX STACKING KIT	38	85



314HX STACKED 2-HIGH