



IMC VULTURE 1204X FLOOR-MOUNTED FOOD WASTE DISPOSER - 3 PHASE [5 WIRE] - W 514 MM - 2.2 KW

MODEL: F54/620



Fast and efficient, the 1204X Waste Disposer is able to dispose of 700kg of food waste per hour and handles up to 1450 covers per sitting, making it ideal for larger hotels, hospitals, universities, prisons and food preparation companies.

An advanced version of the 1204 model, the 1204X is able to switch itself off to save energy and has an automatic rinse function, to prevent nasty odours.

It is suitable for tough waste - red meat bones, cauliflower stalks and fish skins. The free-standing unit can be welded into tabling with a E30/096 hopper rim, for quick loading.

PRODUCT OPTIONS AND ACCESSORIES

- E30/096 Hopper Rim for 1204/1204X/1604/1604X Food Waste Disposer

PRODUCT FEATURES

- Fast and efficient disposal of up to 700kg of food waste per hour.
- Handles up to 1450 covers per sitting - ideal for large kitchens.
- For tough waste (red meat bones, cauliflower stalks and fish skins).
- Free-standing design, but can be welded into tabling with E30/096 hopper rim.
- Manually reversible motor to extend operational life.
- Low-load cut-outs ensure energy and water efficiency.
- Suitable for large kitchens with three-phase, five-wire power supply.

A/A FILE NUMBER:

ITEM NUMBER:



IMC VULTURE 1204X FLOOR-MOUNTED FOOD WASTE DISPOSER - 3 PHASE [5 WIRE] - W 514 MM - 2.2 KW

MODEL: F54/620

WEIGHTS & DIMENSIONS

Width	514 mil
Depth	740 mil
Height	850 mil
Weight	74 kg

SHIPPING DETAILS

Ship Width	79 cm
Ship Depth	54 cm
Ship Height	105 cm
Ship Weight	81.4 kg
Number of Shipment Parcels	1
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No
Returnable Item	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Source Type	Electricity	Number of Electrical Conductor Wires	1
Electrical Amps	5.1	Electrical Connection Type	Direct Hardwired
Electrical Voltage	400	Electrical Plug Type	Hardwired
Electrical Watts	2200	Number of Electrical Plugs	Not Applicable
Electrical Phase	Three	Dedicated Circuit Required	Yes
Kilowatts	2.2 kW	Energy Saving	No

ADDITIONAL SPECIFICATIONS

Airbreak	No	Operator Safety Method	Interlock
Control Type	On/Off	Self-Cleaning Capable	No
Food Waste Types Processed	Tough (all red meat bones, cauliflower stalks, fish skins)	Waste Processing Capacity Per Hour: Weight	700 kg
Meal Waste Servings Processed Per Sitting	1450	Waste Types Processed	Tough (all red meat bones, cauliflower stalks, fish skins)
Motor Power	3 hp		

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.






IMC VULTURE 1204X FLOOR-MOUNTED FOOD WASTE DISPOSER -
3 PHASE [5 WIRE] - W 514 MM - 2.2 KW

MODEL: F54/620

TECHNICAL DRAWING

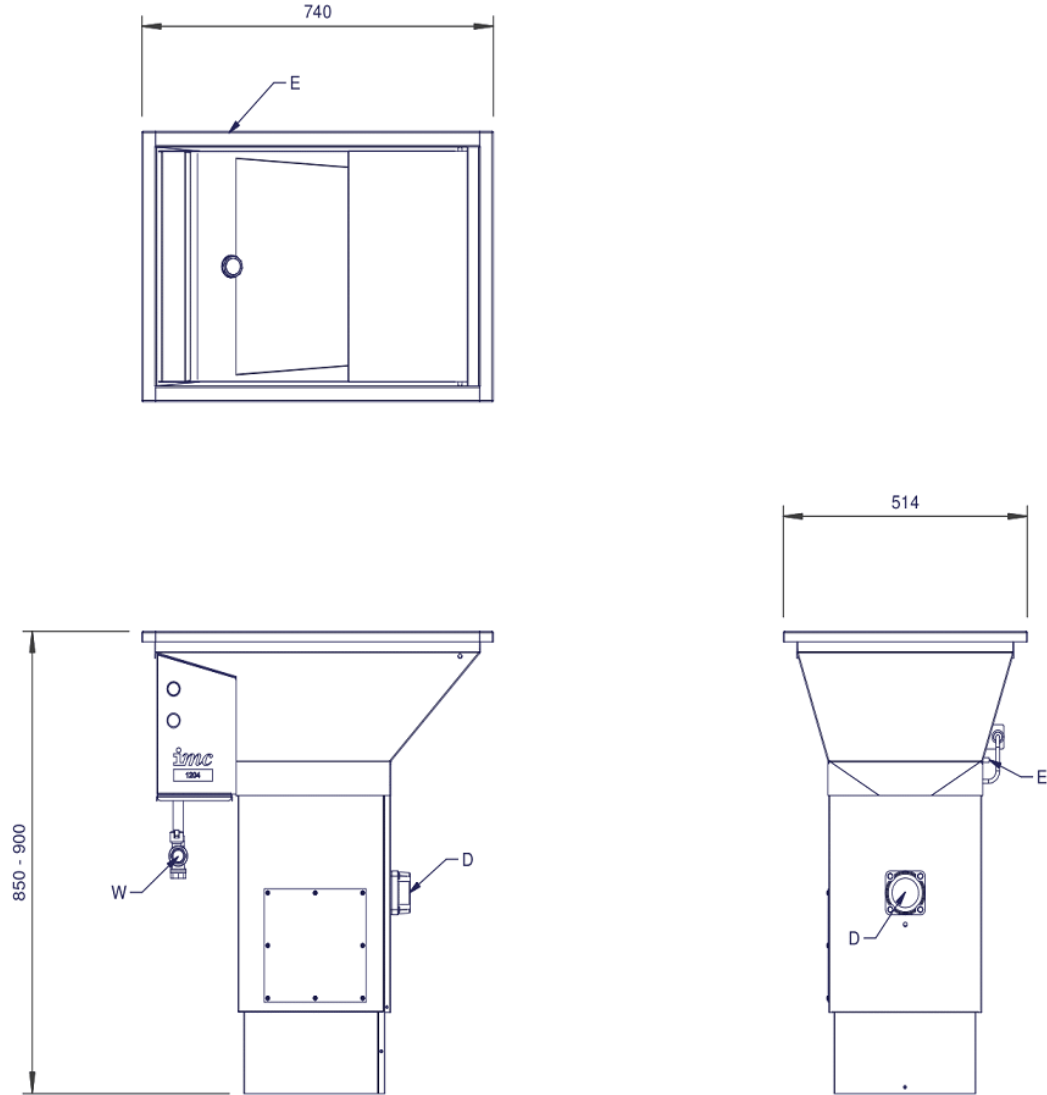

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
January 23, 2024