

**Worktop induction hob/cooker-hood**  
**4-zones 88 cm**  
**Black**

EAN 5414425133949



## Cooker hood

### Dimensions hood (mm)

|                         |                     |
|-------------------------|---------------------|
| Dimensions (WxDxH) (mm) | 821 x 165 x 760-840 |
|-------------------------|---------------------|

### Energy label

|                                             |      |
|---------------------------------------------|------|
| Energy efficiency class (EEIhood)           | B    |
| Annual energy consumption (kWh/y) (AEChood) | 50,5 |
| Fluid Dynamic Efficiency class (FDEhood)    | B    |
| Lighting Efficiency class (LEhood)          | -    |
| Grease Filtering Efficiency class (GFEhood) | C    |

### General information

|                                           |                              |
|-------------------------------------------|------------------------------|
| Integrated motor                          | •                            |
| Sound absorber                            | •                            |
| Number of metal grease filters            | 2                            |
| Recirculation (default setting)/ Duct out | • / •                        |
| Dimensions exhaust (mm)                   | 89 x 222                     |
| Position exhaust                          | Bottom center / front / back |

### Functions

|                                          |                                |
|------------------------------------------|--------------------------------|
| Preadjusted extraction function          | •                              |
| Manual extraction function               | •                              |
| Control                                  | Touch control                  |
| Lock function control                    | •                              |
| Number of speeds                         | 5 + 3 intensive                |
| Delayed switch off (minutes)             | 10-30                          |
| Grease filter cleaning indication        | •                              |
| Recirculation filter cleaning indication | •                              |
| Removable glass                          | •                              |
| Aspiration heights (cm)                  | 10, 20, 30 + freely adjustable |
| Watertank(s) for cleaning                | 2 upper, 2 lower               |

### Air flow & noise level

|                                                                              |       |
|------------------------------------------------------------------------------|-------|
| Air flow duct out (m <sup>3</sup> /u) (EN 61591):                            |       |
| - Minimum                                                                    | 193   |
| - Maximum                                                                    | 691   |
| - Best efficiency point                                                      | 346   |
| Air pressure (Pa):                                                           |       |
| - Maximum                                                                    | 437   |
| - Best efficiency point                                                      | 325   |
| Sound pressure /power duct out setting (dB(A) re 1 pW)(EN 60704-2-13):       |       |
| - Minimum                                                                    | 27/37 |
| - Maximum continues                                                          | 46/57 |
| - Maximum intensive                                                          | 56/65 |
| Sound pressure / power recirculation setting (dB(A) re 1 pW)(EN 60704-2-13): |       |
| - Minimum                                                                    | 30/45 |
| - Maximum continues                                                          | 47/59 |
| - Maximum intensive                                                          | 55/67 |

# Induction hob

## General characteristics

|                                |   |
|--------------------------------|---|
| Black opaque glass             | • |
| Bevelled glass edge            | • |
| Surface and flushline mounting | • |

## Dimensions hob (mm)

|                                            |                |
|--------------------------------------------|----------------|
| Dimensions (WxDxH) (mm)                    | 880 x 520 x 57 |
| Cut-out worktop (WxD)(mm)                  | 860 x 500      |
| Dimensions cut-out with inset (WxDxH) (mm) | 884 x 524 x 6  |

## Cooking zones

|                                                |                 |
|------------------------------------------------|-----------------|
| Octagonal zones (induction 240 x 200 mm)       | 4               |
| Power per zone (min. - max. / super power) (W) | 111 - 2100/3700 |

## Cooking functions

|                           |                                       |
|---------------------------|---------------------------------------|
| Control                   | Slider touch control with white LED's |
| Power levels              | 9 + Power + Super Power               |
| Timer per zone            | •                                     |
| Minute minder             | •                                     |
| Stop&Go                   | •                                     |
| Keep warm function        | • (42, 70 and 94 °C)                  |
| Automatic bridge function | • (2x)                                |
| Residual heat indication  | •                                     |
| Automatic cooking         | •                                     |
| Child lock function       | •                                     |
| Automatic pan recognition | •                                     |
| Grill function            | •                                     |

## Technical specifications


|                                      |                             |
|--------------------------------------|-----------------------------|
| Maximum power cooker hood            | 250 W                       |
| Maximum power induction hob          | 7.400 W                     |
| Electrical connection cooker hood    | 230 V                       |
| Power cable cooker hood              | Schuko 1m5                  |
| Electrical connection induction hob  | 230 V / 400V - 1N / 2N / 3N |
| Power cable induction hob            | 2m                          |
| Power consumption in stand-by Ps (W) | <0,5 W                      |
| Weight (kg)                          | 50,1                        |

## Accessories


### Accessories

|                                                                                    |         |
|------------------------------------------------------------------------------------|---------|
| Recirculation box                                                                  |         |
| - Recirculation box H 98 with Monoblock filter WHITE (98x818x290mm)                | 7921400 |
| - Recirculation box H 98 with Monoblock filter BLACK (98x818x290mm)                | 7922400 |
| - Recirculation box H 98 with Monoblock filter STAINLESS STEEL LOOK (98x818x290mm) | 7923400 |


Dimensions

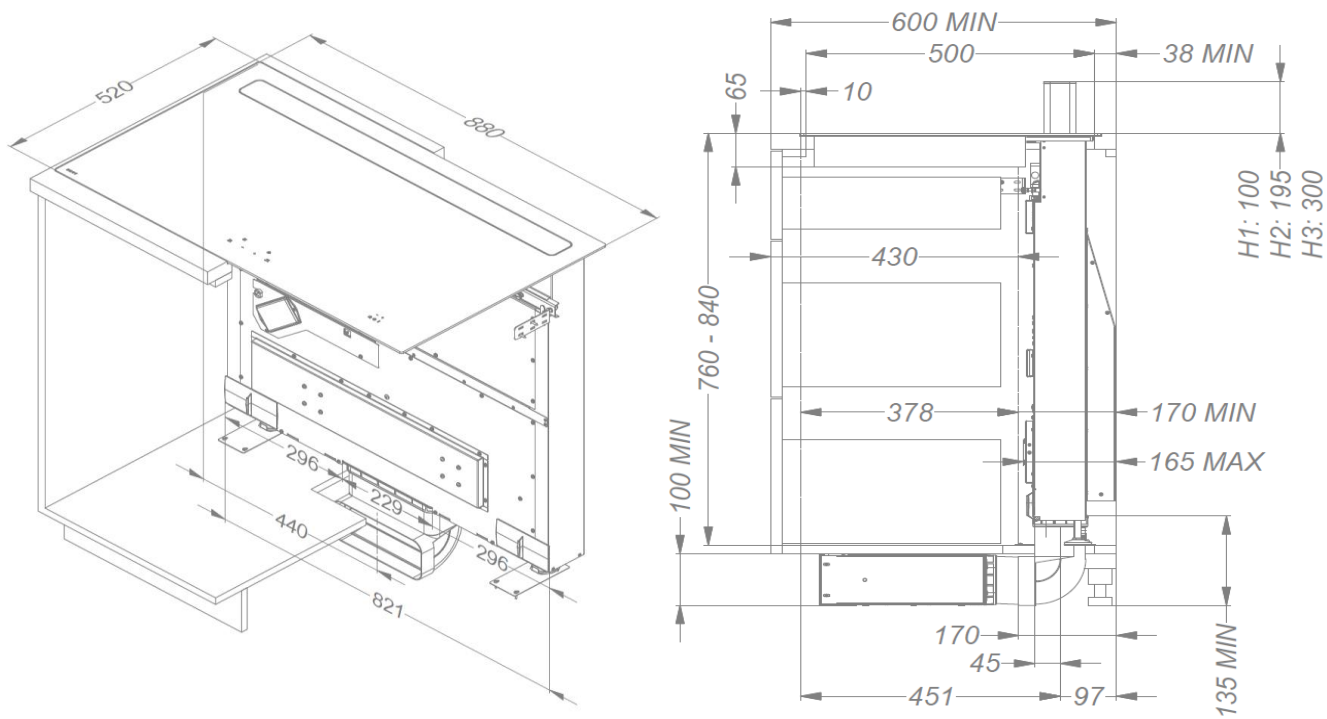

Surface mounting

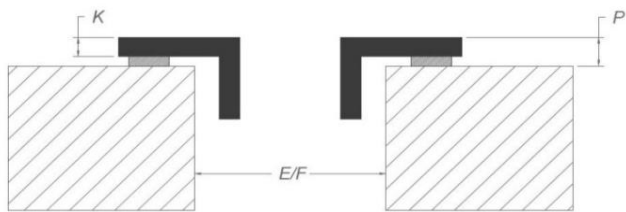

Flushline mounting

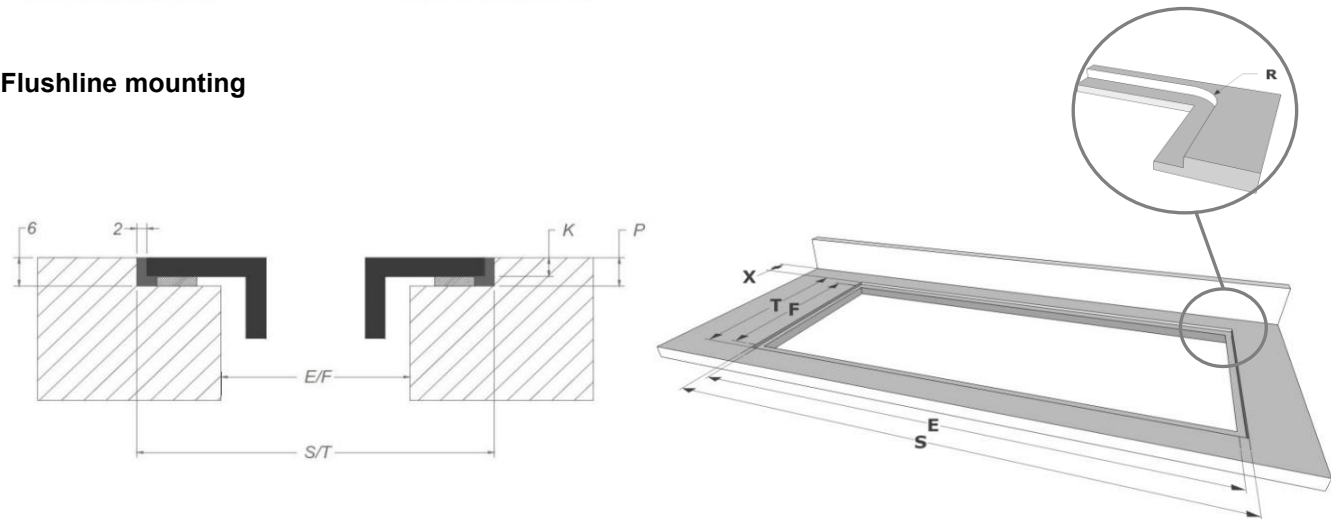

Dimensions

|            | mm  |     |   |   |   |     |     |        |
|------------|-----|-----|---|---|---|-----|-----|--------|
|            | E   | F   | K | P | R | S   | T   | X      |
| Surface    | 860 | 500 | 4 | 6 |   |     |     | 38 min |
| Flushmount | 860 | 500 | 4 | 6 | 8 | 884 | 524 | 38 min |

