

**Telescopic
Novy Fusion Pro 120 cm
Anthracite**

EAN 5414425203550

**Energy label**

▪ Energy Efficiency class (EElhood)	A
▪ Annual Energy Consumption (kWh/year) (AEChood)	37,8
▪ Fluid Dynamic Efficiency class (FDEhood)	A
▪ Lighting Efficiency class (LEhood)	A
▪ Grease Filtering Efficiency class (GFEhood)	C

Functions & features

▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ Recirculation	Optional
▪ InTouch function	Standard
▪ Auto stop	▪
▪ Delayed switch off (minutes)	10
▪ Grease filter	680021
▪ Number of grease filters	2
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪
▪ Control method	Touch control
▪ Number of speeds	3 + power
▪ Automatic Power revert (minutes)	6

Dimensions

▪ Product dimensions (WxDxH) (mm)	1200 x 300 x 340
▪ Dimensions cut-out opening (WxD) (mm)	x
▪ Min dimensions cabinet (WxDxH) (mm)	1200 x 300 x 340
▪ Suitable for installation in a bottomless cabinet	▪
▪ Thickness side panel cabinet (mm)	16, 18, 19
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	500 - 750
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	500 - 750
▪ Diameter outlet (mm)	150
▪ Position exhaust	Top

Lighting

▪ Functional lighting type	Led strip
▪ Functional light dimmable	▪
▪ Number of functional lights	2
▪ Total energy consumption functional light (W)	18
▪ Color functional light (K)	3000

Airflow and noise level

▪ Free airflow (m ³ /h)	815
------------------------------------	-----

Airflow and noise level


- Airflow (m³/h) measured according to EN 61591
- Sound regulation according to EN 60704-2-13
- Airflow duct out speed 1 (m³/h) / Max pressure duct out speed 1 (Pa) 361 / 178
- Airflow duct out speed 2 (m³/h) / Max pressure duct out speed 2 (Pa) 493 / 354
- Airflow duct out speed 3 (m³/h) / Max pressure duct out speed 3 (Pa) 547 / 386
- Airflow duct out max powerspeed (m³/h) (Qboost) / Max pressure duct out max powerspeed (Pa) 632 / 397
- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 1 (dB(A)) 35 / 48
- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 2 (dB(A)) 43 / 56
- Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 3 (dB(A)) 46 / 59
- Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct out at max powerspeed (dB(A)) (LWAboost) 50 / 62

Technical specifications


- | | |
|---|-----|
| ▪ Maximum power (W) | 124 |
| ▪ Voltage appliance (V) | 230 |
| ▪ Frequency (Hz) | 50 |
| ▪ Power consumption in stand-by-mode (Ps) (W) | 0,4 |
| ▪ Net weight (kg) | 18 |
| ▪ Length power supply cable (m) | 1,1 |

8770, 8711

1


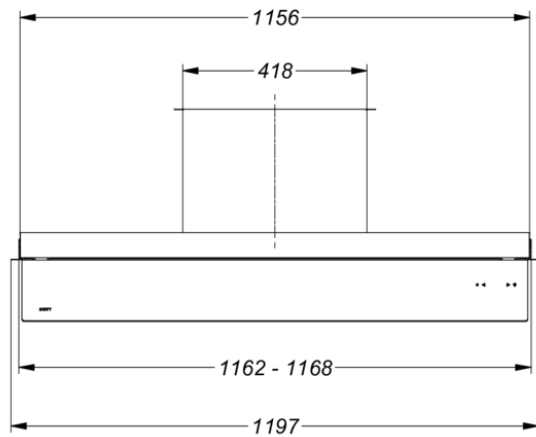


2

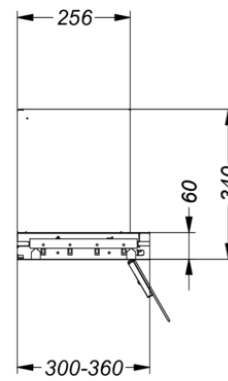

4

3

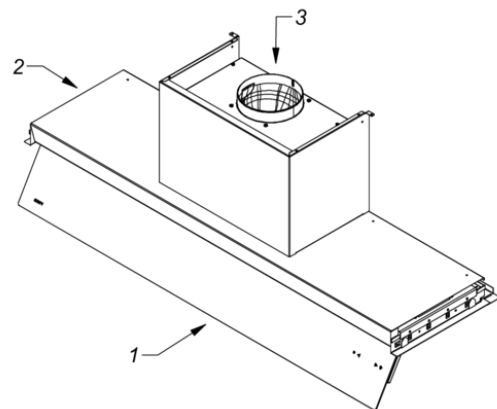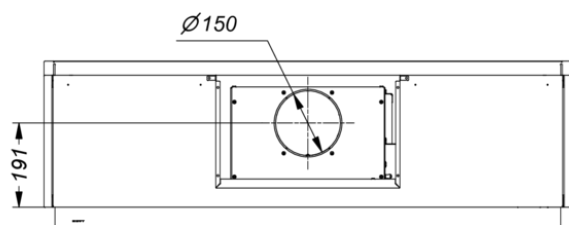

Installation accessories

Back panel & chimney extensions

- 88408175 Chimney extension Novy Fusion Pro

Additional accessories

- 840029 Remote control (optional)

Accessories

Recirculation kit



680400

Monoblock recirculation set Novy Fusion (Pro) / Novy Fusion+



906450

Exhaust grill for upper cabinet black

