

**Telescopic  
Novy Fusion Pro 120 cm  
White**



EAN 5414425249671

**Energy label**

|  |      |
|--|------|
| ▪ Energy Efficiency class (EEhood)               | A    |
| ▪ Annual Energy Consumption (kWh/year) (AEChood) | 37,8 |
| ▪ Fluid Dynamic Efficiency class (FDEhood)       | A    |
| ▪ Lighting Efficiency class (LEhood)             | A    |
| ▪ Grease Filtering Efficiency class (GFEhood)    | C    |

**Functions & features**

|  |               |
|--|---------------|
| ▪ Motor                                    | Integrated    |
| ▪ Sound absorber                           | Integrated    |
| ▪ Recirculation                            | Optional      |
| ▪ InTouch function                         | Standard      |
| ▪ Auto stop                                | ▪             |
| ▪ Delayed switch off (minutes)             | 10            |
| ▪ Grease filter                            | 680021        |
| ▪ Number of grease filters                 | 2             |
| ▪ Grease filter cleaning indication        | ▪             |
| ▪ Recirculation filter cleaning indication | ▪             |
| ▪ Control method                           | Touch control |
| ▪ Number of speeds                         | 3 + power     |
| ▪ Automatic Power revert (minutes)         | 6             |

**Dimensions**

|   |                  |
|---|------------------|
| ▪ Product dimensions (WxDxH) (mm)                         | 1200 x 310 x 340 |
| ▪ Dimensions cut-out opening (WxD) (mm)                   | x                |
| ▪ Min dimensions cabinet (WxDxH) (mm)                     | 1200 x 300 x 340 |
| ▪ Suitable for installation in a bottomless cabinet       | ▪                |
| ▪ Thickness side panel cabinet (mm)                       | 16, 18, 19       |
| ▪ Advised mounting height induction hobs (Hmin-Hmax) (mm) | 500 - 750        |
| ▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)       | 650 - 750        |
| ▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)   | 500 - 750        |
| ▪ Diameter outlet (mm)                                    | 150              |
| ▪ Position exhaust  | Top              |

**Lighting**

|   |           |
|---|-----------|
| ▪ Functional lighting type                      | Led strip |
| ▪ Functional light dimmable                     | ▪         |
| ▪ Number of functional lights                   | 2         |
| ▪ Total energy consumption functional light (W) | 18        |
| ▪ Color functional light (K)                    | 3000      |

**Airflow and noise level**

|                                    |     |
|------------------------------------|-----|
| ▪ Free airflow (m <sup>3</sup> /h) | 815 |
|------------------------------------|-----|

## Airflow and noise level

---

- Airflow (m<sup>3</sup>/h) measured according to EN 61591
- Sound regulation according to EN 60704-2-13
- Airflow duct out speed 1 (m<sup>3</sup>/h) / Max pressure duct out speed 1 (Pa) 361 / 178
- Airflow duct out speed 2 (m<sup>3</sup>/h) / Max pressure duct out speed 2 (Pa) 493 / 354
- Airflow duct out speed 3 (m<sup>3</sup>/h) / Max pressure duct out speed 3 (Pa) 547 / 386
- Airflow duct out max powerspeed (m<sup>3</sup>/h) (Qboost) / Max pressure duct out max powerspeed (Pa) 632 / 397
- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 35 / 48 1 (dB(A))
- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 43 / 56 2 (dB(A))
- Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 46 / 59 3 (dB(A))
- Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct out at max powerspeed (dB(A)) (LWAboost) 50 / 62


## Technical specifications

---


|   |     |
|---|-----|
| ▪ Maximum power (W)                           | 124 |
| ▪ Voltage appliance (V)                       | 230 |
| ▪ Frequency (Hz)                              | 50  |
| ▪ Power consumption in stand-by-mode (Ps) (W) | 0,4 |
| ▪ Net weight (kg)                             | 18  |
| ▪ Length power supply cable (m)               | 1,1 |

8770, 8711

1


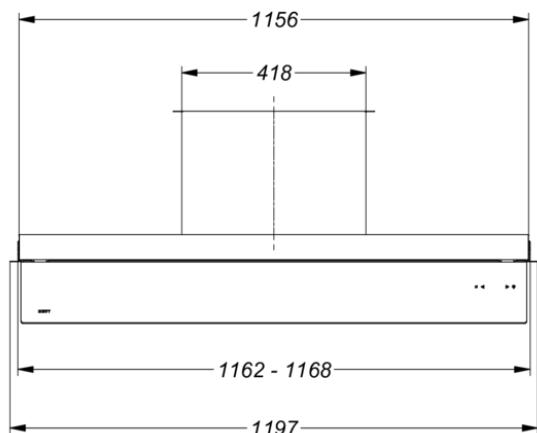


2

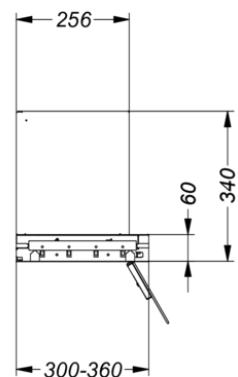

4

3

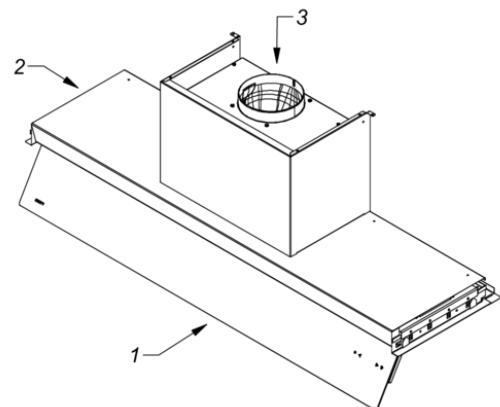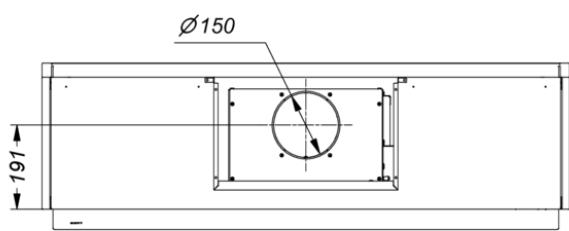

**Installation accessories**

---

**Back panel & chimney extensions**

- 88408175

Chimney extension Novy Fusion Pro

**Additional accessories**

- 840029

Remote control (optional)

**Accessories**

---

**Recirculation kit**

680400

Monoblock recirculation set Novy Fusion (Pro) / Novy Fusion+



906450

Exhaust grill for upper cabinet black

## Efficiency Curve

