

Ascent Touch

Real Coffee

- Not americano
- Perfectly dialed with 9 parameters

Better than Traditional

- Consistent temperature
- Quicker than pourover
- No waste or stale coffee

Ground to Order

- 16oz in 30 seconds
- 4 independent grinders: 4 is more!

Easy to Operate

- Consumer first for self-serve
- Easy upkeep: refill beans, empty grounds, 10min clean



 **CONCORDIA**
SEATTLE BUILT

SCA Gold Standard Cup quality

Following Specialty Coffee Association standards, whole beans are ground and brewed for each cup, ensuring you get the best tasting, freshest brewed coffee every time, hot or iced.

Zero Waste with minimal consumables

Say goodbye to running out of filters, batches gone cold, and stale burnt flavor. Say hello to freshness that stays true to how the coffee was meant to taste.

What is ALPS Brewing Technology?

The Ascent Touch was designed to deliver the Gold Cup brewed coffee experience quickly, by brewing at lower pressures than traditional espresso machines. ALPS stands for Accelerated Low Pressure Steeping: our approach balances pressure, flow, and chamber design to create a coffee flavor, previously only matched by manual brewing. Unlike traditional brewing methods, the ALPS system requires no filters, preserving essential oils and aromas in the final cup.

Control brew recipes with adjustable functions.

- Grind volume
- Grind size
- Water volume
- Water temperature
- Brewing contact time
- Pre-Infusion



Brew 4 standard sizes (plus carafes!)	Simplified 10min daily cleaning
ADA Touchpad	Brew chamber holds up to 40 grams of coffee
Compact design	Iced coffee - needs separate external ice machine
Customize from 8oz to 96oz (237-2840ml) carafes	Customizable Recipes Per Brew
Remote IoT by Middleby's Open Kitchen	Supported by nationwide factory-trained technicians

Specifications


- Dimensions 12.5" W x 27.8" D X 38.2" H
- Weight 125lbs net/57kg net
- Electric 200-240VAC 50/60Hz 30A
Dedicated Circuit
- Water Min 25psi, Max 100psi,
25gal per/hr flow
- Drain 3/4" indirect drain
OD of 1 1/4", drain within 5 ft.
- Shipping Specs 20" x 38" x 42"
200lbs

Site Electrical Requirements


Plug Included is L6-30P
Nema L6-30R Receptacle



Front View

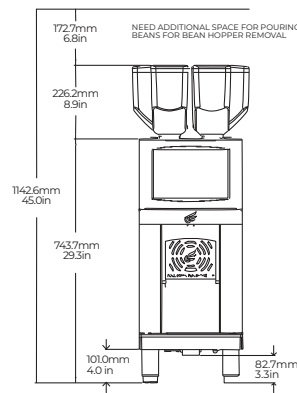

Side View

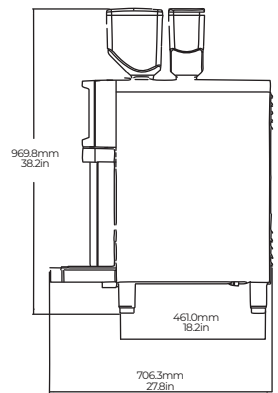

800.778.0990

Note: Please refer to this model's installation checklist for more detailed information on site and consumable requirements.

Concordia units come with a standard 1 Year Parts and Labor warranty. Preventative Maintenance packages available with machine purchase.