

Double door upright

ice storage bins



model# 2845 shown



model# 4345 shown

Features

Four capacities available: 3,557 lb (1,613 kg) to 6,522 lb (2,958 kg)

Convenient design

- two large openings for scoop dispensing
- spring loaded door hinge
- transparent view windows
- adjustable feet provide stability

Fresher ice

- first ice in is first ice out

Ice compatibility

- compatible with cube ice, flake ice and customer preferred Chewblet® ice

Durable construction

- full stainless steel – front, back, sides, bottom and liner
- 1.50" (3.81 cm) foamed in-place polyurethane insulation keeps ice colder for longer
- factory installed 1" NPS stainless steel drain
- stainless steel baffle prevents ice overflow

Assembly required

- snout (tool-free)
- 6.00" (15.24 cm) legs with an adjustable hex toe, allowing up to 1.00" (2.54 cm) adjustment for leveling

Warranty

- 1 year parts and labor
- 3rd party ice machines must be installed and operated in accordance with the manufacturer's instructions
- visit kloppenberg.com for complete warranty details

Certifications (applied to all models unless otherwise noted)



Options and accessories¹

- Stainless steel liner
- Fully welded stainless steel liner (coved corners)
- Flanged feet
- Ice shovel (item# 4030063)
- Ice scoop (item# 4030062)
- 48" (121.9 cm) ice paddle (item# 4030060)
- 60" (152.4 cm) ice paddle (item# 4030061)
- Ice cart, 250 lb (114.0 kg) capacity (item# PCC-250)
- Cart totes, set of 6 (item# 4030064)




2627 W Oxford Ave, Englewood, CO 80110, USA
1.800.346.3246 | 1.303.761.1615 | kloppenberg.com

801 Church Lane | Easton, PA 18040, USA
1.800.523.9361 | Fax: +1.610.250.0696 | follettice.com

FOLLETT®

¹ Certifications do not apply to options and accessories.

Dimensional drawing

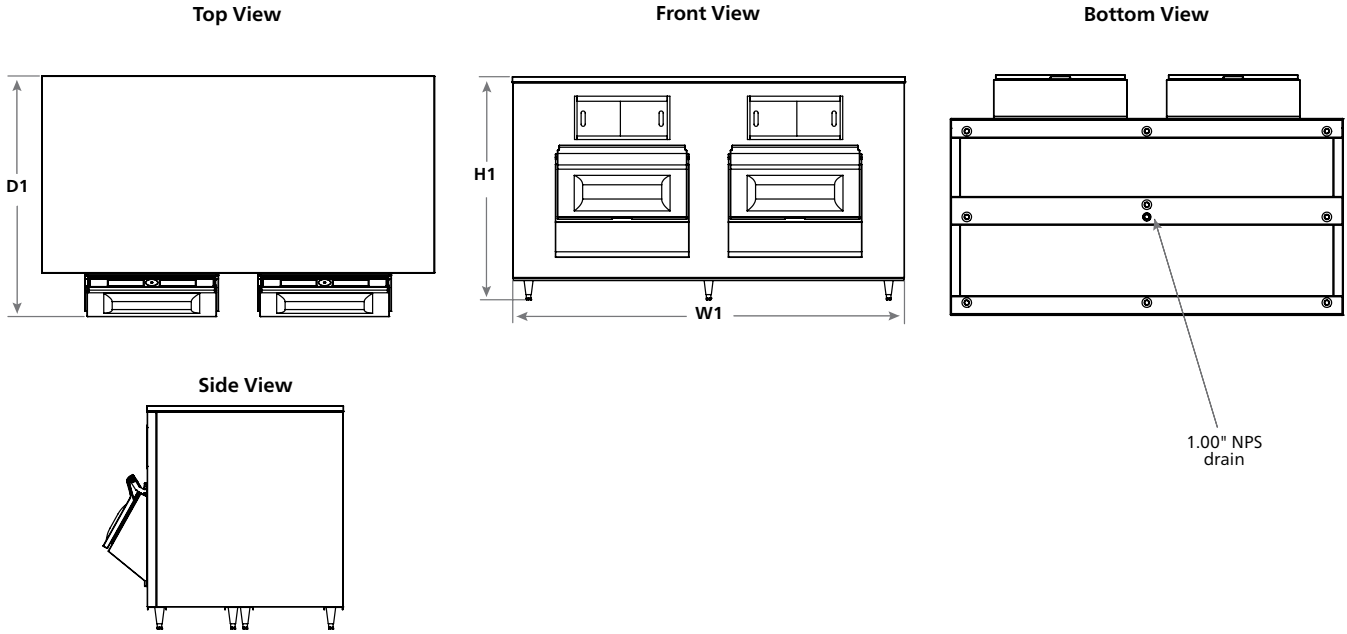

Model	Maximum bin capacity lb (kg)	Width - W1 in (cm)	Depth - D1 ¹ in (cm)	Height - H1 in (cm)	Minimum door clearance in (cm)	Approximate ship weight lb (kg)
3147	4,470 (2,028)	78.00 (198.1)	40.00 (101.6)	78.00 (198.1)	40.00 (101.6)	690 (313)
2845	3,557 (1,613)	96.00 (243.8)	58.50 (148.6)	55.00 (139.7)	48.00 (121.9)	660 (299)
4345	5,039 (2,286)	96.00 (243.8)	58.50 (148.6)	75.00 (190.5)	48.00 (121.9)	1,095 (497)
5835	6,522 (2,958)	96.00 (243.8)	58.50 (148.6)	96.00 (243.8)	48.00 (121.9)	1,185 (538)

¹ Includes 10.50" (26.7 cm) depth for snout.

SHORT FORM SPECIFICATION: Double door upright ice storage bin to be Kloppenberg® model _____3147 (4,470 lb (2,028 kg) of ice storage) or _____2845 (3,557 lb (1,613 kg) of ice storage) or _____4345 (5,039 lb (2,286 kg) of ice storage) or _____5,835 (6,522 lb (2,958 kg) of ice storage). 304 stainless steel front and sides, stainless steel or galvanized back and bottom. Bin insulation to be CARB compliant non-HFC polyurethane foam 1.50" (3.81 cm) thick. Bin liner to be _____seamless polyethylene or _____304 stainless steel with option for seamless fully welded coved corners. Custom cut bin top to be constructed of 304 stainless steel for ice machine configuration. Transparent view windows and spring loaded door hinge. Bin to have adjustable feet. Bin drain to be 1.00" NPS stainless steel. NSF listed.

CHEWBLET, FOLLETT and KLOPPENBERG are registered trademark of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Double door upright bins