FOLLETT® IM-0460 Ice Cube Machine

Models

☐ IM-0460-AC ☐ IM-0460-AH ☐ IM-0460-WC ☐ IM-0460-WH



FOLLETT IM-0460 ice machine on a IB-033 bin

*Ice Machine and Bin sold separately

- Up to 444 lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Sides & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- Power cord with NEMA 5-15 plug
- R-404A refrigerant

Ice Shape



Half Cube
⅜" x 1⅛" x ⅞"
(.95 x 2.86 x 2.22 cm)



Cube
⅞" x ⅞" x ⅞"
(2.22 x 2.22 x 2.22 cm)

Factory Warranty

Parts & Labor
3 YR Ice Maker
5 YR Evaporator
Parts
5 YR Compressor

1 YEAR EXTENDED WARRANTY

Extend parts & labor warranty 1 year by installing an IcePro filter/cartridge and by registering it at: icetrowaterproducts.com/registration/

* Applies only to new ice machines, at the time of original installation & start-up.

** Requires replacement of the filter cartridge every 6 months or earlier

Specifications

BTU Per Hour:
6,184

Refrigerant:
R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

Ice Machine Electric


115/60/1

Minimum circuit ampacity:
Air-cooled: 15 *1ph*
Water-cooled: 15 *1ph*

Maximum fuse size:
Air-cooled: 25 *1ph*
Water-cooled: 25 *1ph*

Accessories

Bin-Stat Kit
IBO-150KIT
Recommended when ice machine is installed on soda dispenser.



Water Filtration IcePro 500 (replaces Icepro 400)
Reduces sediment and chlorine contaminants with the use of Citrine.




Follett Products, LLC
801 Church Lane
Easton, PA 18040
1-800-523-9361


REV. 09/16/2026

FOLLETT® IM-0460 Ice Cube Machine

IM-0460 Air Cooled

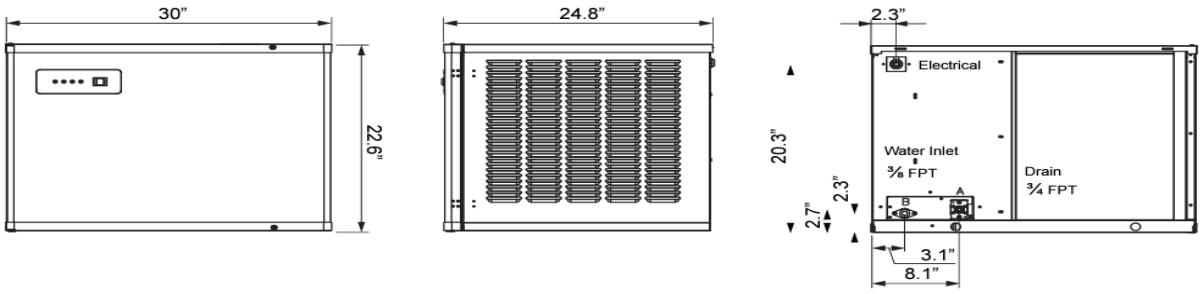

IM-0460 Water Cooled

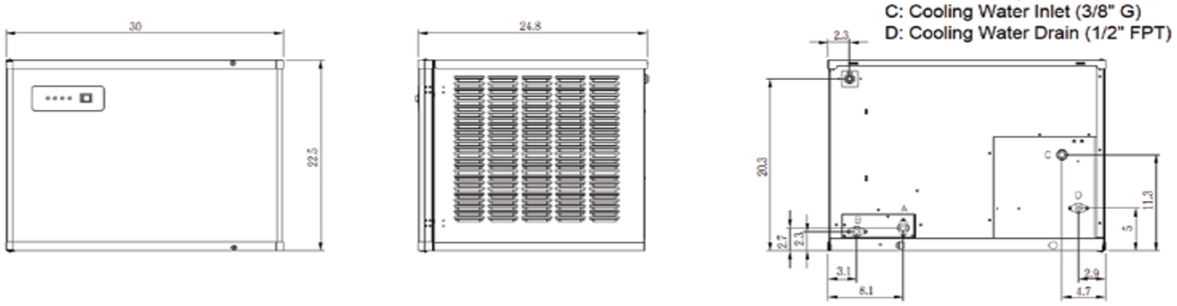

FRONT VIEW | SIDE VIEW | BACK VIEW

Specifications

Dimensions	Width	Depth	Height	Weight
IM-0460 Machine	30"	24.8"	22.6"	162.3 lbs (Net) 195 lbs (Shipping)

	Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice*
			70°Air/ 50°F Water	90°Air/ 70°F Water		
			1 ph	1 ph	1 Ph	
AIR COOLED	IM-0460-AC	cube	444 lbs	376 lbs	5.43	15 Gal.
			201 kgs	171 kgs		15 Gal.
	IM-0460-AH	half-cube	444 lbs	376 lbs	5.43	15 Gal.
			201 kgs	171 kgs		15 Gal.
WATER COOLED	IM-0460-WC	cube	463 lbs	407 lbs	4.56	15 Gal.
			210 kgs	185 kgs		15 Gal.
	IM-0460-WH	half-cube	463 lbs	407 lbs	4.56	14 Gal.
			210 kgs	185 kgs		15 Gal.

*Water-cooled condenser uses 82.1 gal/100 lbs. of ice

Follett Products, LLC
801 Church Lane
Easton, PA 18040
1-800-523-9361