



Project Name: \_\_\_\_\_ AIA#: \_\_\_\_\_  
Model #: \_\_\_\_\_ Location: \_\_\_\_\_  
SIS#: \_\_\_\_\_ Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

# SG213 Premium Advanced Manual Slicer

## **Precision Cutting** **Powerful Performance** **Easy Cleaning**

The heavy-duty S2-Series of premium slicers from Globe deliver powerful performance in a compact, intuitive design with improved cleanability and Globe-trusted durability.



**SG213**

**Removable knife makes cleanup easier while providing more operator protection**



**REVIT**



**AutoQuotes**

**Model:** SG213 (*Advanced Manual*)

### **Standard Features:**

#### **Cutting System**

- 13" carbon steel knife with hardened edge provides quality slices and higher yields
- Top mounted knife sharpening system utilizes long-lasting synthetic diamond wheels for quick and easy sharpening

#### **Interlocks**

- No-Volt Release: prevents inadvertent reactivation of knife in the event of power interruption
- Carriage Interlock: prevents the knife from running when the carriage is not secured
- Home To Start: ensures the carriage is in the home position in order for the unit to start
- Close To Stop: powers the unit down after the slicer gauge plate is closed
- Knife Time Out: automatically shuts off the motor if the carriage remains idle for 30 seconds (time can be adjusted to as little as 5 seconds or turned off completely)

#### **Product Handling**

- Large-capacity carriage accommodates prosciutto, mortadella, and bacon
- Patented meat grip design for superior product hold
- 50° gravity-feed carriage design guides product toward the blade for effortless slicing

#### **Cleanability**

- Patented, anodized aluminum design and construction for quick and easy cleaning
- Patented, removable meat grip design allows for easy handling and is dishwasher safe
- Removable upper carriage with lock-and-slide design allows for easy reassembly and unobstructed cleaning
- Removable knife sharpener for quick and easy cleaning
- Integrated lift lever allows easy access for fast, efficient cleaning

#### **Structure & Controls**

- Reverse-action cam driven indexing system enables accurate and precise slice thickness adjustment up to 5/8" (0.625"), with optimum control on the thinnest cuts
- Control panel features tactile Start and Stop buttons as well as power and run indicator lights

#### **Interface & Diagnostics**

- Patented, graphic user interface with Clear-Text LCD display provides built-in site diagnostics and system counters
- Patent-pending, 4-hour cleaning notification keeps operators on schedule for regular cleaning and sanitation
- Multi-language interface (English, French, Spanish)

#### **Warranty**

- *Two year parts and labor*

Approved by: \_\_\_\_\_ Date: \_\_\_\_\_



## SG213 Premium Advanced Manual Slicer Factory Installed Options



### Removable Knife Package (KNIFE-RMV)

- Knife is secured in tool for operator protection
- Tool easily removes knife for more access under the knife and faster, easier cleanup
- Knife and removal tool are dishwasher safe

### Stainless Steel Blade (SSK)

- Ideal for highly acidic applications commonly found in preparation of onions and citrus fruits
- Resists enzyme/protein exposure in raw red meat slicing to help prevent corrosion and extend blade life
- Offers better corrosion resistance caused by extreme moisture applications (meat rooms)



## S2-Series Advanced Model Features

- Home To Start ensures the carriage is in the home position in order for the unit to start
- Patented 4-Hour Cleaning notification keeps operators on schedule for regular cleaning and sanitation
- Carriage Interlock prevents knife from running when the carriage is not secured
- Knife Time Out automatically shuts off the motor if the carriage remains idle for 30 seconds (timer can be adjusted to as little as 5 seconds or turned off completely)





# SG213 Premium Advanced Manual Slicer Accessories



☐ **S2-FF125**  
*Low Food Fence*  
(12.125" x 1.125")



☐ **S2-FF300**  
*High Food Fence*  
(12.125" x 3.00")



☐ **S2-FPA**  
*Food Prep Attachment*  
(14.00" x 7.76")



☐ **SC-LARGE**  
*Slicer Sanitation Cover*



☐ **S-XDSLM**  
*Extended 3-YEAR Warranty*

## S2-Series Features, Options & Accessory Guide

| FEATURE                                                               | S213 | S213A | SG213 | SG213A |
|-----------------------------------------------------------------------|------|-------|-------|--------|
| Lock and Slide Removable Carriage                                     | ■    | ■     | ■     | ■      |
| Removable Carriage Interlock                                          |      |       | ■     | ■      |
| Home to Start (Carriage must be in Home position for blade to rotate) |      |       | ■     | ■      |
| Home Return                                                           |      |       |       | ■      |
| Time Out (Blade will stop running if not in use)*                     |      |       | ■     | ■      |
| Close to Stop (Blade will stop running when gauge plate is closed)    |      |       | ■     | ■      |
| LCD Display                                                           |      | ■     | ■     | ■      |
| Site Diagnostics                                                      |      | ■     | ■     | ■      |
| System Counters                                                       |      | ■     | ■     | ■      |
| No Volt Release                                                       | ■    | ■     | ■     | ■      |
| Slicing Length Settings                                               |      | 2     |       | 3      |
| Slicing Speed Settings                                                |      | 2     |       | 4      |
| <b>CORR</b> - Correctional Package (Factory Option)**                 | ■    | ■     |       |        |
| <b>KNIFE-RMV</b> - Removable Knife (Factory Option)                   |      |       | ■     | ■      |
| <b>FROZEN</b> - Frozen Package (Factory Option)***                    | ■    | ■     |       |        |
| <b>SSK</b> - Stainless Steel Knife (Factory Option)****               | ■    | ■     | ■     | ■      |

\*Time Out is programmable. Factory setting is 30 seconds.



\*\*Correctional package has a fixed carriage

\*\*\*Frozen package has a max slice thickness of 1/8"

\*\*\*\*Made from SS430 stainless steel



# SG213 Premium Advanced Manual Slicer

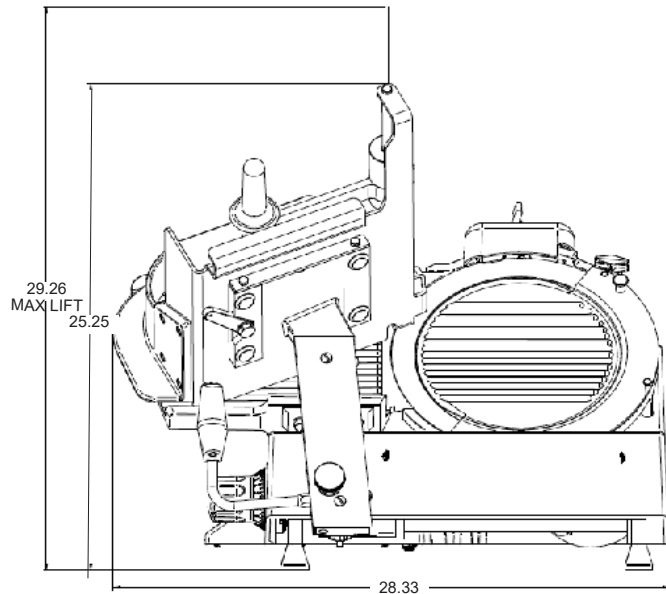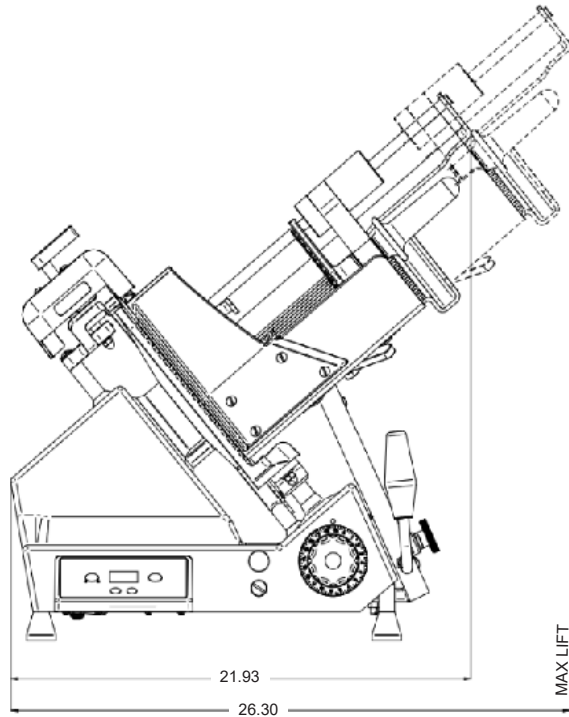

UNIT: Inches

Drawings available through KCL. [www.kclcad.com](http://www.kclcad.com)

## SPECIFICATIONS

| Model | Motor  | Volts    | Amps | NEMA Plug Type                                                                           | Drive Type  | Slicing Vol. / Day | Cheese Slicing                                                                      | Blade Diameter    | Max Slice           | Product Cutting Capacity |                   |                   |
|-------|--------|----------|------|------------------------------------------------------------------------------------------|-------------|--------------------|-------------------------------------------------------------------------------------|-------------------|---------------------|--------------------------|-------------------|-------------------|
|       |        |          |      |                                                                                          |             |                    |                                                                                     |                   |                     | D (Diameter)             | H (Height)        | W (Width)         |
| SG213 | 1/2 HP | 110-60-1 | 2    | 5-15  | Poly-V Belt | All Day            |  | 13"<br>(33.02 cm) | 5/8"<br>(1.8588 cm) | 7.5"<br>(19.05 cm)       | 13.75"<br>(35 cm) | 11"<br>(27.94 cm) |

Cord & Plug: Attached 7 ft. flexible 3-wire cord with molded plug fits a grounded receptacle.

## DIMENSIONS | SHIPPING INFORMATION

Reinforced carton for shipping. The weight and dimensions of this reinforced carton are included below and may vary from shipment to shipment.

**Shipped on a pallet. Freight class 85.**

| Model | Max Overall Dimensions                                     | Net Weight            | Shipping Dimensions                                    | Shipping Weight        |
|-------|------------------------------------------------------------|-----------------------|--------------------------------------------------------|------------------------|
| SG213 | 22" W x 28.3" D x 25.3" H<br>(55.9 cm x 71.9 cm x 64.3 cm) | 89 lbs.<br>(40.37 kg) | 32" W x 31.5" D x 31.5" H<br>(81.3 cm x 80 cm x 80 cm) | 129 lbs.<br>(58.51 kg) |

### FACTORY INSTALLED OPTIONS:

- ☐ KNIFE-RMV - Removable knife includes removal tool
- ☐ SSK - Stainless steel knife in lieu of Carbon Steel

### OPTIONAL ACCESSORIES:

- ☐ S2-FF125 - Food Fence Low, 1.25"
- ☐ S2-FF300 - Food Fence High, 3.00"
- ☐ S2-FPA - Food Prep Attachment
- ☐ SC-LARGE - Sanitation Cover
- ☐ S-XDSLM - Extended 3-Year Warranty

Constructed of durable anodized aluminum for quick, easy cleaning and long service life, the SG213 features a 13" carbon steel knife with a hardened edge for consistent slice quality and higher yields. A top-mounted knife sharpening system uses long-lasting synthetic diamond wheels for quick, easy sharpening, and the sharpener is removable for simplified cleaning. Precise slicing is supported by a reverse-action, cam-driven indexing system providing accurate thickness adjustment up to 5/8" (0.625") with excellent control on the thinnest cuts. Product handling is optimized with a large-capacity 50° gravity-feed carriage designed to accommodate items such as prosciutto, mortadella, and bacon, along with a patented meat grip for superior product hold. Supported by multiple interlocks including No-Volt Release, Carriage Interlock, Home to Start, Close to Stop, and a Knife Time Out feature that automatically shuts off the motor after 30 seconds of inactivity (adjustable down to 5 seconds or can be disabled). Cleanability is enhanced with a removable, dishwasher-safe meat grip, a removable upper carriage with lock-and-slide design for unobstructed access, an integrated lift lever for easier access, and the removable sharpener. The control panel includes tactile Start/Stop buttons plus power and run indicator lights, while the patented graphic user interface with Clear-Text LCD display provides built-in site diagnostics, system counters, and a multi-language interface (English, French, Spanish). A patent-pending 4-hour cleaning notification helps keep operators on schedule for regular sanitation. ETL listed. Backed by a two-year parts and labor warranty.