RECTANGULAR SINAQUA
WITH 3-IN-1 CONTROLS
Drop-in Waterless Buffet Warmer



PERFORMANCE

The CookTek® Drop-in SinAqua™ is a waterless buffet warmer featuring an aluminum housing and a high-impact polycarbonate interior surface. The SinAqua™ requires no water lines or drains and has precise temperature holding for each pan to maximize food quality. Each unit is programmed with an automatic pan detection feature to ensure maximum and efficient warming of induction-compatible pans.*

EXTERIOR CONSTRUCTION

- Available in 100–120 or 200–240 VAC, single phase
- Available in 4” or 6” depths with three or six sensors
  - Three sensors (three temperature zones) can accommodate a standard hotel or gastronorm pan or up to three 1/3 pans
  - Six sensors (three temperature zones) can accommodate a standard hotel or gastronorm pan, up to three 1/3 pans, or up to six 1/6 pans
- Waterless design – no water or drains needed
- Drop-in design with aluminum housing and a high-impact, easy-to-clean polycarbonate interior surface
- Highly visible and durable capacitive touch user interface
- Automatic pan detection allows for instant energy transmission to pan; almost no energy consumption when pan is not present
- Lock feature prevents unwanted setting changes
- Microprocessors monitor vital components to check for overheating, power supply issues, and more

STANDARD INCLUDED ACCESSORIES

- Standard Cat 5e or Cat 6 patch cable from unit to control box
- 6-ft (1.8 m) nominal plug and cord
- One-year limited parts and labor warranty (U.S. and Canada)

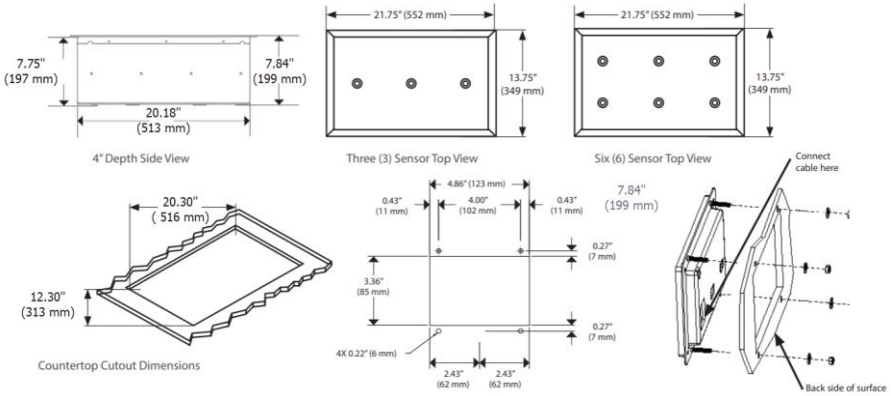
OPTIONAL ACCESSORIES

- Stainless Steel Countertop Housing for Two-Sensor Unit (Part #302049)
- Stainless Steel Countertop Housing for Three and Six-Sensor Unit (Part #302050)
- Stainless Steel Countertop Housing (Part #302687)

*SinAqua Drop-in Buffet Warmers are designed to be used with induction-compatible pans.

It is the owner and installer’s responsibility to comply with all local codes. CookTek reserves the right to substitute components or change specifications without prior notice.

IHW3n1-SPC-A / January 2026



4" DIMENSIONS		
Full Unit Height	7.84"	199 mm
Full Unit Width	13.75"	349 mm
Full Unit Depth	21.75"	552 mm
Internal (Usable) Height	4"	102 mm
Internal (Usable) Width	12.18"	309 mm
Internal (Usable) Depth	20.18"	513 mm
Cutout Width	12.30"	311 mm
Cutout Depth	20.30"	516 mm
Weight	17 lb	7.7 kg
CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
Below	6"	152 mm

SHIPPING INFORMATION		
Packaged Height	12"	305 mm
Packaged Width	18"	457 mm
Packaged Depth	24"	610 mm
Packaged Weight	25.9 lb	11.7 kg
Item Class	250 NMFC #26710	


AS/NZS 3112:2000, 10 A, 250 V


CEE 7/7 Schuko, 16 A, 250 V


SI 32, 16 A, 250 V


BS1363, 13 A, 230 V


NEMA 5-15P

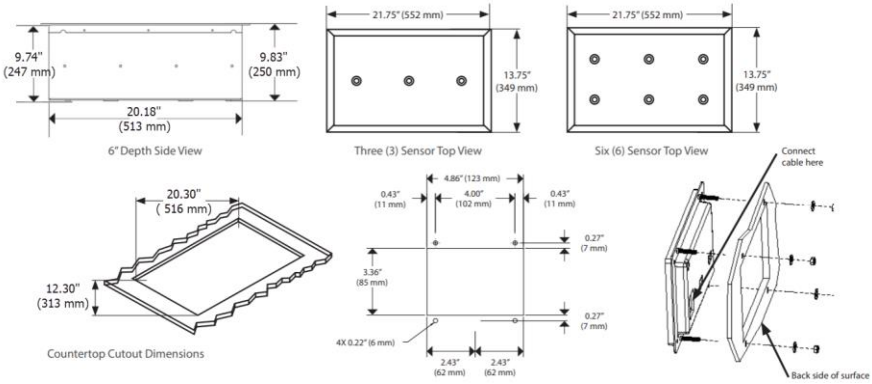

BS 546, 16 A, 250 V


NEMA 6-20P

⚠ Dedicated circuit required for each installation

ELECTRICAL SPECIFICATIONS – SINGLE PHASE (THREE SENSOR)			
UNITED STATES/CANADA			
IHW061-34-3	685101	100–120 VAC, 50/60 Hz, 650 W	NEMA 5-15P
IHW062-34-3	685201	200–240 VAC, 50/60 Hz, 650 W	NEMA 6-20P
UK/SAUDI ARABIA			
IHW062-34-3	685202	200–240 VAC, 50/60 Hz, 650 W	BS1363, 13 A, 230 V
INTERNATIONAL			
IHW062-34-3	685203	200–240 VAC, 50/60 Hz, 650 W	CEE 7/7 Schuko, 16 A, 250 V
AUSTRALIA			
IHW062-34-3	685204	200–240 VAC, 50/60 Hz, 650 W	AS/NZS 3112:2000, 10 A, 250 V
SOUTH AFRICA			
IHW062-34-3	685207	200–240 VAC, 50/60 Hz, 650 W	BS 546, 16 A, 250 V
ISREAL			
IHW062-34-3	685208	200–240 VAC, 50/60 Hz, 650 W	SI 32, 16 A, 250 V
ELECTRICAL SPECIFICATIONS – SINGLE PHASE (SIX SENSOR)			
UNITED STATES/CANADA			
IHW061-64-3	687101	100–120 V, 50/60 Hz, 650 W	NEMA 5-15P
IHW062-64-3	687201	200–240 VAC, 50/60 Hz, 650 W	NEMA 6-20P
UK/SAUDI ARABIA			
IHW062-64-3	687202	200–240 VAC, 50/60 Hz, 650 W	BS1363, 13A, 230V
INTERNATIONAL			
IHW062-64-3	687203	200–240 V, 50/60 Hz, 650 W	CEE 7/7 Schuko, 16 A, 250 V
AUSTRALIA			
IHW062-64-3	687204	200–240 VAC, 50/60 Hz, 650 W	AS/NZS 3112:2000, 10 A, 250 V
SOUTH AFRICA			
IHW062-64-3	687207	200–240 VAC, 50/60 Hz, 650 W	BS 546, 16 A, 250 V
ISREAL			
IHW062-64-3	687208	200–240 VAC, 50/60 Hz, 650 W	SI 32, 16 A, 250 V

2801 Trade Center Drive | Carrollton, TX 75007
+1 214-379-6000 | cooktek.com



6" DIMENSIONS		
Full Unit Height	9.83"	250 mm
Full Unit Width	13.75"	349 mm
Full Unit Depth	21.75"	552 mm
Internal (Usable) Height	6"	152 mm
Internal (Usable) Width	12.18"	309 mm
Internal (Usable) Depth	20.18"	513 mm
Cutout Width	12.30"	313 mm
Cutout Depth	20.30"	516 mm
Weight	17 lb	7.7 kg
CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
Below	6"	152 mm

SHIPPING INFORMATION		
Packaged Height	12"	305 mm
Packaged Width	18"	457 mm
Packaged Depth	24"	610 mm
Packaged Weight	25.9 lb	11.7 kg
Item Class	250 NMFC #26710	


AS/NZS 3112:2000, 10 A, 250 V


CEE 7/7 Schuko, 16 A, 250 V


SI 32, 16 A, 250 V


BS1363, 13 A, 230 V


NEMA 5-15P


BS 546, 16 A, 250 V


NEMA 6-20P

⚠ Dedicated circuit required for each installation

ELECTRICAL SPECIFICATIONS – SINGLE PHASE (THREE SENSOR)			
UNITED STATES/CANADA			
IHW061-36-3	684101	100–120 VAC, 50/60 Hz, 650 W	NEMA 5-15P
IHW062-36-3	684201	200–240 VAC, 50/60 Hz, 650 W	NEMA 6-20P
UK/SAUDI ARABIA			
IHW062-36-3	684202	200–240 VAC, 50/60 Hz, 650 W	BS1363, 13 A, 230 V
INTERNATIONAL			
IHW062-36-3	684203	200–240 VAC, 50/60 Hz, 650 W	CEE 7/7 Schuko, 16 A, 250 V
AUSTRALIA			
IHW062-36-3	684204	200–240 VAC, 50/60 Hz, 650 W	AS/NZS 3112:2000, 10 A, 250 V
SOUTH AFRICA			
IHW062-36-3	684207	200–240 VAC, 50/60 Hz, 650 W	BS 546, 16 A, 250 V
ISREAL			
IHW062-36-3	684208	200–240 V, 50/60 Hz, 650 W	SI 32, 16 A, 250 V
ELECTRICAL SPECIFICATIONS – SINGLE PHASE (SIX SENSOR)			
UNITED STATES/CANADA			
IHW061-66-3	686101	100–120 VAC, 50/60 Hz, 650 W	NEMA 5-15P
IHW062-66-3	686201	200–240 VAC, 50/60 Hz, 650 W	NEMA 6-20P
UK/SAUDI ARABIA			
IHW062-66-3	686202	200–240 VAC, 50/60 Hz, 650 W	BS1363, 13 A, 230 V
INTERNATIONAL			
IHW062-66-3	686203	200–240 VAC, 50/60 Hz, 650 W	CEE 7/7 Schuko, 16 A, 250 V
AUSTRALIA			
IHW062-66-3	686204	200–240 VAC, 50/60 Hz, 650 W	AS/NZS 3112:2000, 10 A, 250 V
SOUTH AFRICA			
IHW062-66-3	686207	200–240 VAC, 50/60 Hz, 650 W	BS 546, 16 A, 250 V
ISREAL			
IHW062-66-3	686208	200–240 V, 50/60 Hz, 650 W	SI 32, 16A, 250V

2801 Trade Center Drive | Carrollton, TX 75007
+1 214-379-6000 | cooktek.com