



**IMC FROSTAR FR60 GLASS FROSTER [TOP LOAD] - BLACK
EXTERIOR - W 600 MM - 0.65 KW**

MODEL: F49/400/BS



Frostar

PRODUCT OPTIONS AND ACCESSORIES

- S49/017 Bottle Opener and Cap Catcher for FR60/90 Glass Froster
- BA52/060 Speed Rail for FR60 Glass Froster

PRODUCT FEATURES

- Chills and frosts glasses, to enhance the taste and appearance of drinks
- Rapid chill to -17°C to keep drinks colder for longer
- Efficient design means up to 75 glasses can be chilled at the same time
- Top loading with sliding cover for quick and easy access
- Stylish stainless steel exterior to suit any commercial bar setting
- UK 3 pin plug - simply plug in and switch on.

The sleek Frostar FR60 chills glasses and liqueurs down to -17°C, enabling commercial bars to create high-quality drinks that look great and stay colder for longer, to boost profits. The FR60 also removes the need for ice, which dilutes drinks and impacts on taste.

The compact, yet robustly built FR60 provides storage for up to 75 standard pint glasses, whilst its top-loading design with sliding cover gives bar staff easy access, so drinks can be served quickly.

With a stylish black exterior, the FR60 is perfectly suited to any bar setting.

AIA FILE NUMBER:

ITEM NUMBER:



**IMC FROSTAR FR60 GLASS FROSTER [TOP LOAD] - BLACK
EXTERIOR - W 600 MM - 0.65 KW**

MODEL: F49/400/BS

WEIGHTS & DIMENSIONS

Width	600 mil
Depth	620 mil
Height	900 mil
Weight	56.5 kg

SHIPPING DETAILS

Ship Width	68 cm
Ship Depth	68 cm
Ship Height	105 cm
Ship Weight	62.15 kg
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Electrical Plug Type	UK 3-Pin Plug
Electrical Total Amperage	2.71 A	Number of Electrical Plugs	1
Electrical Volts	240V	Electrical Connection Type	Cord and Plug
Electrical Total Wattage	650 W	Number of Electrical Conductor Wires	1
Electrical Kilowatts	0.65 kW	Dedicated Circuit Required	No
Electrical Phase	1-Phase	Electrical Remarks	Single

ADDITIONAL SPECIFICATIONS

Application Type	Undercounter	Insulated	Yes
Capacity (Volume)	132 l	Number of Shelf Positions	2
Construction Materials	Stainless Steel	Number of Shelves	3
Control Type	Digital Touch Pad, Electronic	Refrigerant Type	R-290
Defrost Method	Automatic	Type of Lighting	Fluorescent
		Temperature Maximum	-17 °C

BIDDING SPECIFICATIONS (SHORT FORM SPECS)




Bidding Specifications Not Available.



IMC FROSTAR FR60 GLASS FROSTER [TOP LOAD] - BLACK
EXTERIOR - W 600 MM - 0.65 KW

MODEL: F49/400/BS

TECHNICAL DRAWING

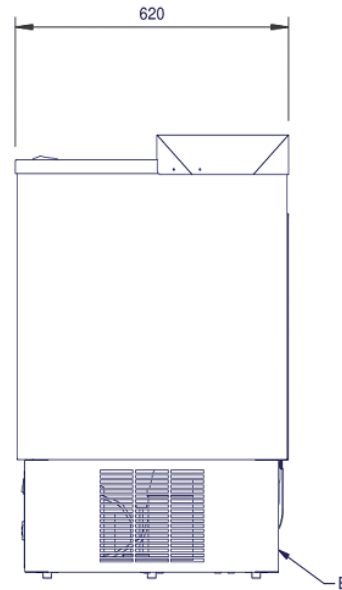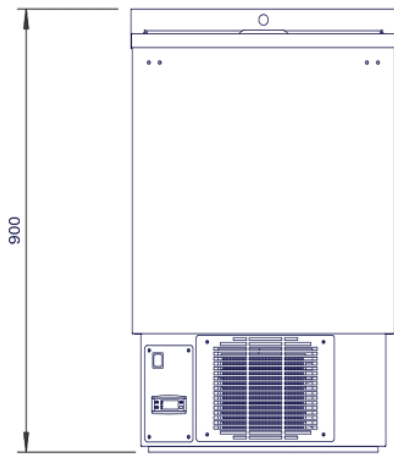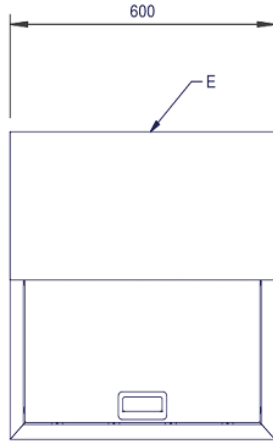

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
March 24, 2025