IMC SP12H FLOOR-MOUNTED POTATO PEELER - 1 PHASE - H 1400 MM - 0.37 KW

MODEL: F58/902

AIA FILE NUMBER:

ITEM NUMBER:



SP PEELER

UKThe efficient, upright IMC Potato Peeler ensures short preparation times which in turn reduces costly wage bills and makes for better staff utilisation. Ideal for medium and large scale operations, the peeler comes with reversible corrosion-proof liners. With a capacity of 12kg, it takes two minutes to peel a full batch of potatoes. The peeler is a perfect height for emptying into a sink and is hygienic and easy to clean.

PRODUCT OPTIONS AND ACCESSORIES

- S58/568 Filter Basket - Integral - for SP Potato Peeler
- S58/569 Interceptor Tank - for SP Potato Peeler [pedestal mounted/2 " BSP]
- A29/003 Lid Retaining Strap for SP/VQ Potato Peeler
- S58/570 Waste Ejector for SP Potato Peeler [2" BSP]

PRODUCT FEATURES

- Able to peel 12kg of potatoes in 2 minutes up to 220kg per hour
- Upright design with small footprint, ideal for medium and large operations
- Low pedestal for quick and easy discharge of potatoes
- Lubricated, heavy duty gearbox makes peeling operation smooth and reliable
- Dual position waste outlets and smooth cylinder base for quick, easy cleaning proof plate and replaceable liners for effective peeling
- Long lasting, rust
- Suitable for kitchens with single phase power supply
- WRAS approved Class A air break and brass spray nozzle to prevent water escape
- 2 minutes to peel a batch of 12 kilos of potatoes

Whisby Road, Lincoln, LN6 3QZ, UK
www.lincat.co.uk/brands/imc | p: +44 1522 875500

IMC SP12H FLOOR-MOUNTED POTATO PEELER - 1 PHASE - H 1400 MM - 0.37 KW

MODEL: F58/902

WEIGHTS & DIMENSIONS

Product Width	530 mm
Product Depth	624 mm
Product Height	1,388 mm
Product Dimensions (WxDxH) (mm)	530 Millimeter X 624 Millimeter X 1388 Millimeter

SHIPPING DETAILS

Ship Width	68 cm
Ship Depth	57 cm
Ship Height	148 cm
Ship Weight	55.55 kg
Ship Method	Small Parcel (Ups Fedex Dhl)
Shipping Package Type	Pieces

WATER, PLUMBING, AND DRAINAGE SPECIFICATIONS

Water Inlet Size	12 mm
Water Inlet Pressure Minimum	2.7 Bar
Water Inlet Pressure Maximum	3.8 Bar

PRODUCT CERTIFICATION ICONS

Made in UK UKCA IP55

ENERGY SPECIFICATIONS

Primary Energy Type	Electric
Electrical Volts	230V

ADDITIONAL TECHNICAL SPECIFICATIONS

Hopper Load	12
Motor Power	0.5

bidding specifications


IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.


Document Auto-Generated


IMC SP12H FLOOR-MOUNTED POTATO PEELER - 1 PHASE - H 1400 MM - 0.37 KW

MODEL: F58/902

TECHNICAL DRAWING



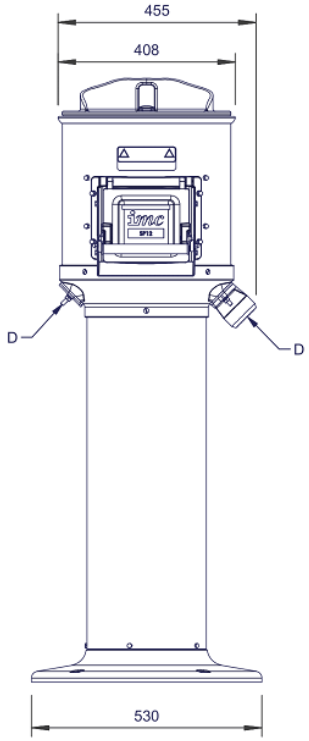

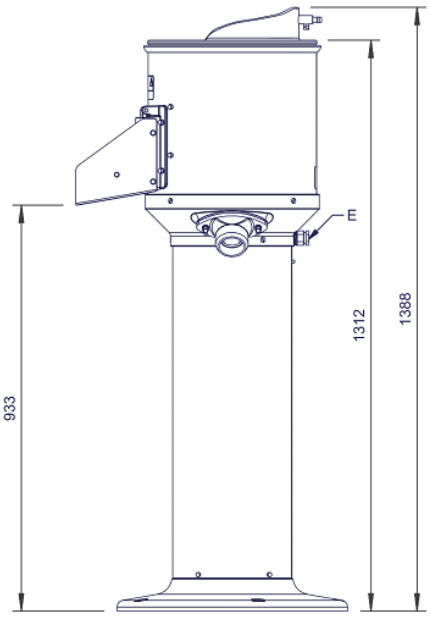

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated