



IMC VULTURE 825 IN-TABLING FOOD WASTE DISPOSER - 3 PHASE [4 WIRE] [AIR BREAK] - W 360 MM - 2.2 KW

MODEL: F68/324



Vulture

PRODUCT FEATURES

- Fast and efficient disposal of up to 600kg of food waste per hour.
- Handles up to 1350 covers per sitting - ideal for large kitchens.
- For tough waste (red meat bones, cauliflower stalks and fish skins).
- Compact design, welded into tabling, for quick and easy loading.
- Manually reversible motor to extend operational life.
- With class A airbreak kit - recommended when connecting to a mains water supply.
- Suitable for medium kitchens with three-phase, four-wire power supply.

Fast and efficient, the 825 Waste Disposer with airbreak enables large kitchens to remove waste quickly and simply. It is able to dispose of 600kg of food waste per hour and handles up to 1350 covers per sitting, making it ideal for larger hotels, hospitals, universities, prisons and food preparation companies.

The 825 Waste Disposer is suitable for tough waste - red meat bones, cauliflower stalks and fish skins. With a compact design, the unit can be welded into a table, making it quick and easy to load, saving staff time and labour.

With a smooth stainless steel finish, the 825 Waste

A/A FILE NUMBER:

ITEM NUMBER:



IMC VULTURE 825 IN-TABLING FOOD WASTE DISPOSER - 3 PHASE [4 WIRE] [AIR BREAK] - W 360 MM - 2.2 KW

MODEL: F68/324

WEIGHTS & DIMENSIONS

Width	360 mil
Depth	530 mil
Height	919 mil
Weight	51 kg

SHIPPING DETAILS

Ship Width	63 cm
Ship Depth	48 cm
Ship Height	104 cm
Ship Weight	56.1 kg
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

WATER, PLUMBING, AND DRAINAGE SPECS

Water Line Required	Yes
Water Connection Source Type	Water Main
Water Inlet Size	15 mm
Water Inlet Pressure	0.4 Bar
Drain Line Required	Yes
Drain Outlet Size	2 in

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Electrical Plug Type	Hardwired
Electrical Total Amperage	5.3 A	Number of Electrical Plugs	Not Applicable
Electrical Volts	400V	Electrical Connection Type	Direct Hardwired
Electrical Total Wattage	2200 W	Number of Electrical Conductor Wires	1
Electrical Kilowatts	2.2 kW	Dedicated Circuit Required	Yes
Electrical Phase	3-Phase	Electrical Remarks	Three

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
March 24, 2025



**IMC VULTURE 825 IN-TABLING FOOD WASTE DISPOSER - 3 PHASE
[4 WIRE] [AIR BREAK] - W 360 MM - 2.2 KW**

MODEL: F68/324

ADDITIONAL SPECIFICATIONS

Airbreak	Yes	Operator Safety Method	Interlock
Construction Materials	Stainless Steel	Self-Cleaning Capable	No
Control Type	On/Off	Waste Processing Capacity Per Hour: Weight	600 kg
Meal Waste Servings Processed Per Sitting	1350	Waste Types Processed	Tough (all red meat bones, cauliflower stalks, fish skins)
Motor Power	3 hp		

BIDDING SPECIFICATIONS (SHORT FORM SPECS)


Bidding Specifications Not Available.



IMC VULTURE 825 IN-TABLING FOOD WASTE DISPOSER - 3 PHASE
[4 WIRE] [AIR BREAK] - W 360 MM - 2.2 KW

MODEL: F68/324

TECHNICAL DRAWING

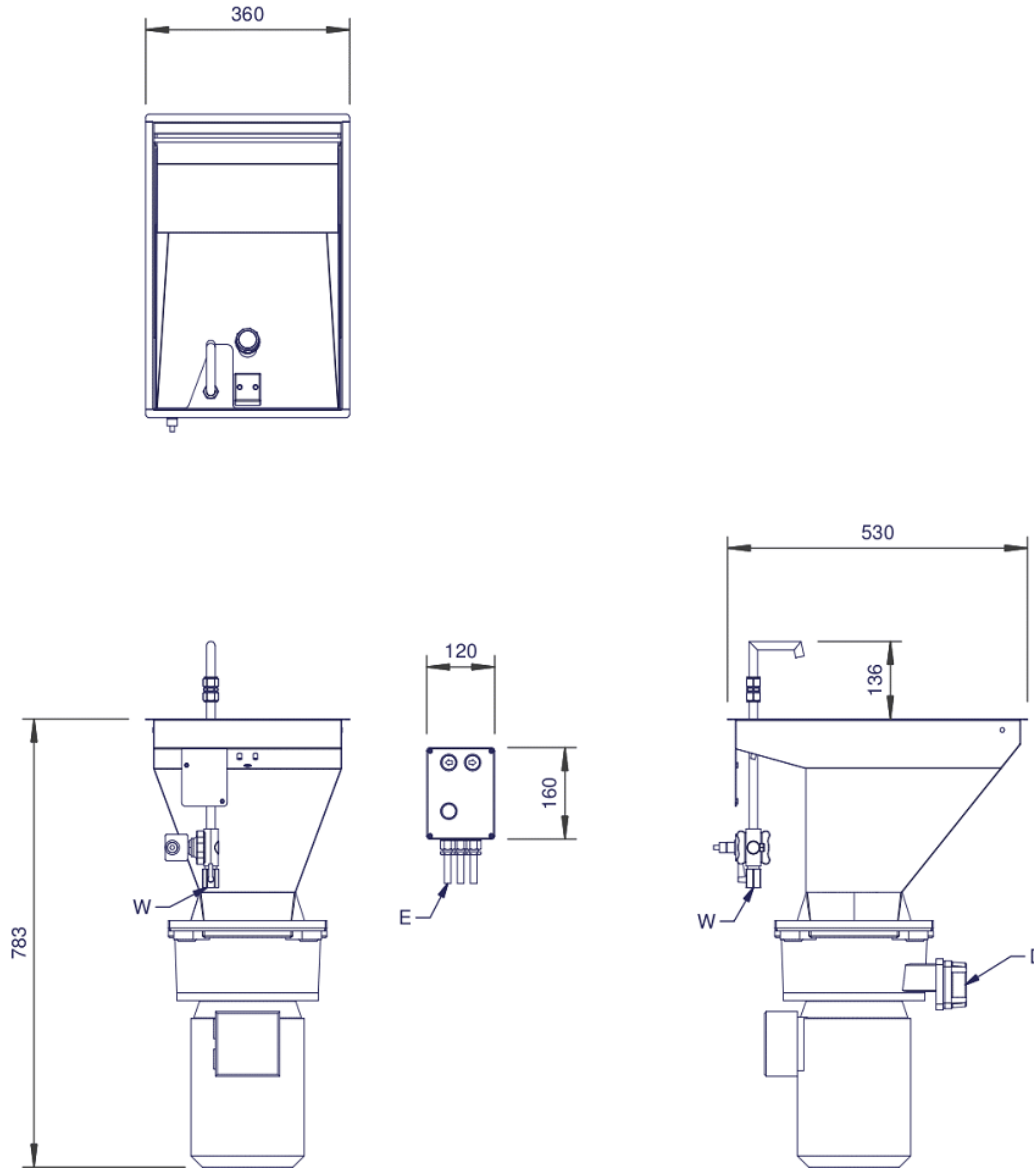

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
March 24, 2025