



**IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR -
BLACK PAINTED FRAME - H 900 MM - W 600 MM - D 450 MM -
R290**

MODEL: F76/153/B



Ventus

PRODUCT FEATURES

- Reduced 450mm depth
- Wide range of options available to customise your bottle cooler, ensure a perfect fit in any bar.
- Elegant, flexible storage for up to 96 bottles
- Dynamic Air Distribution System coupled with efficient compressors and improved insulation ensures superior cooling times.
- Electronic temperature control keeps drinks at the perfect serving temperature
- Energy efficient EcoSmart controller - at the touch of a button, put the bottle cooler into its most economical state until next required
- Sleek stainless steel interior and LED lighting to enhance display
- Single double-glazed lockable door for enhanced security
- UK 3 pin plug allows users to simply plug in and switch on

The V60 provides flexible storage of up to 96 (330ml) bottles. The polished stainless steel interior and LED lighting enhance display, while the black painted exterior cabinet blends seamlessly into any bar setting.

Its electronic temperature controller, supported by an auto defrost function, provides precise monitoring, ensuring drinks are kept at perfect serving temperature. In addition, the energy-saving EcoSmart controller allows users to hold the bottle cooler in its most economical state, until it is required, and an energy-efficient forced air cooling system delivers rapid temperature pull down to keep pace with demand in the busiest of bars.

A/A FILE NUMBER:

ITEM NUMBER:



**IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR -
BLACK PAINTED FRAME - H 900 MM - W 600 MM - D 450 MM -**

MODEL: F76/153/B

WEIGHTS & DIMENSIONS

Width	600 mil
Depth	450 mil
Height	900 mil

SHIPPING DETAILS

Ship Width	75 cm
Ship Depth	60 cm
Ship Height	111 cm
Ship Weight	77.55 kg
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Electrical Plug Type	UK 3-Pin Plug
Electrical Total Amperage	1.64 A	Number of Electrical Plugs	1
Electrical Volts	240V	Electrical Connection Type	Cord and Plug
Electrical Total Wattage	393 W	Number of Electrical Conductor Wires	1
Electrical Kilowatts	0.393 kW	Dedicated Circuit Required	No
Electrical Phase	1-Phase	Electrical Remarks	Single

ADDITIONAL SPECIFICATIONS

Application Type	Undercounter	Insulated	Yes
Capacity: Bottles	96	Number of Shelf Positions	29
Capacity (Volume)	130 l	Number of Shelves	2
Construction Materials	Stainless Steel	Refrigerant Type	R-290
Control Type	Digital Touch Pad, Electronic	Type of Lighting	LED
Defrost Method	Automatic	Temperature Maximum	6 °C
		Temperature Minimum	2 °C

BIDDING SPECIFICATIONS (SHORT FORM SPECS)

Bidding Specifications Not Available.







IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR -
BLACK PAINTED FRAME - H 900 MM - W 600 MM - D 450 MM -

MODEL: F76/153/B

TECHNICAL DRAWING

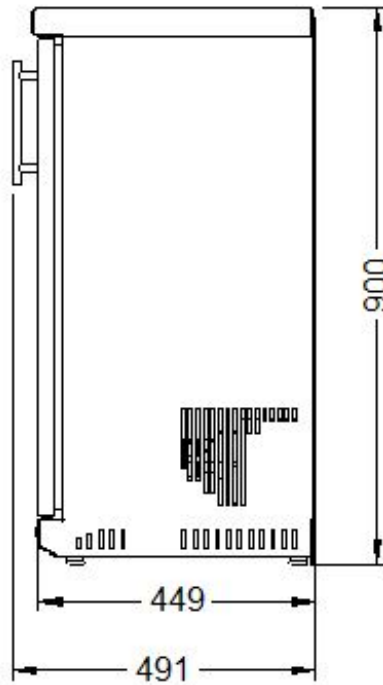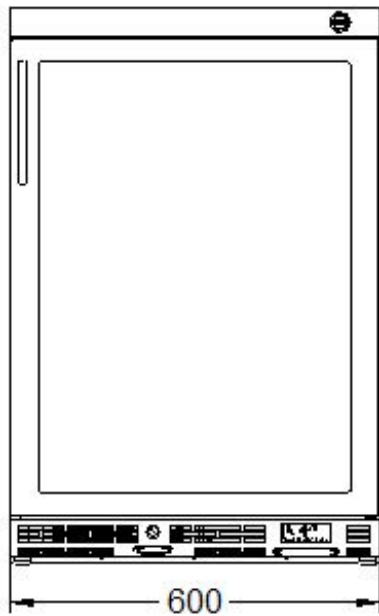

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
March 24, 2025