



The IMC Cirrus 1400L Upright Fridge provides dependable, high-capacity refrigerated storage for busy commercial kitchens. Compatible with GN 2/1 gastronorm containers, it features ventilated cooling for even temperature distribution and electronic controls for precise temperature management. A durable 304 stainless steel interior and exterior, automatic defrost and condensate evaporation minimise maintenance, while R290 refrigerant and high-performance insulation deliver energy-efficient operation. Supplied on castors with 48 shelf positions for flexible storage.

AIA FILE NUMBER:

ITEM NUMBER:

PRODUCT FEATURES

- 1400L capacity – Extra-large refrigerated storage for high-volume commercial kitchens.
- GN 2/1 compatible – Designed to accommodate standard gastronorm containers for maximum flexibility.
- Electronic temperature control – Precise temperature management for reliable food storage.
- Ventilated cooling – Even air circulation ensures consistent temperatures throughout.
- 48 shelf positions – Flexible storage configuration for a wide variety of products.
- 304 stainless steel interior & exterior – Durable, hygienic and easy to clean.
- Rounded internal corners – Improves hygiene with quicker, easier cleaning.
- Automatic defrost – Prevents ice build-up and maintains cooling performance.
- Automatic condensate evaporation – Eliminates the need for manual water disposal.
- Energy-efficient natural refrigerant with low environmental impact.
- High-performance insulation – Retains temperature efficiently to reduce energy consumption.
- Supplied on castors – Easy to move for cleaning and maintenance.
- Plastic-coated shelves – Durable shelving built for everyday



WEIGHTS & DIMENSIONS

Product Width	1,336 mm
Product Depth	800 mm
Product Height	2,090 mm
Product Dimensions (WxDxH) (mm)	1336 Millimeter X 800 Millimeter X 2090 Millimeter

SHIPPING DETAILS

Ship Width	142 cm
Ship Depth	85 cm
Ship Height	228 cm
Ship Weight	180 kg
Shipping Package Type	Pieces

PRODUCT CERTIFICATION ICONS



ENERGY SPECIFICATIONS

Primary Energy Type	Electric
Electrical Volts	230V
Electrical Volts Icon	230V
Electrical Phase Icon	1PH


ADDITIONAL TECHNICAL SPECIFICATIONS

Capacity (Volume)	1,400
Door Material	Solid
Number of Shelves	6
Temperature Minimum	-2
Temperature Maximum	8

BIDDING SPECIFICATIONS (SHORT FORM SPECS)

Bidding Specifications Not Available.

TECHNICAL DRAWING

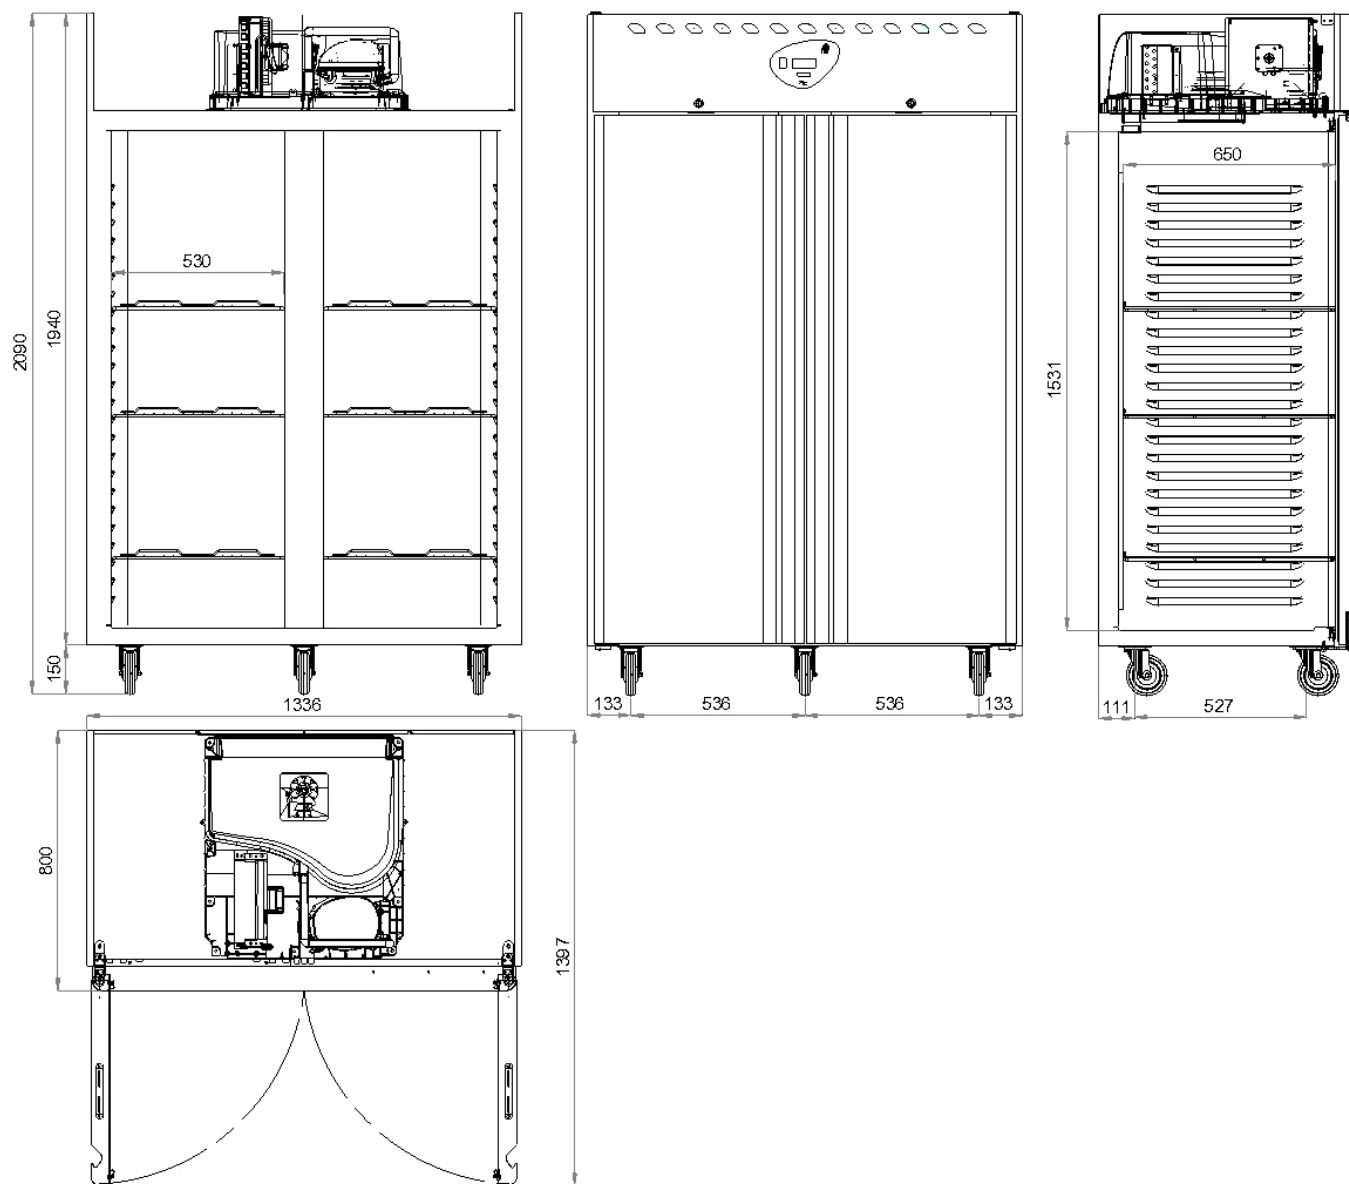

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated