



ELECTRIC HALF SIZE CONVECTION OVENS

IMPERIAL

IMPERIAL



HSICVE-1

Shown with optional casters.



HSICVE-2

HALF SIZE ELECTRIC CONVECTION OVEN

- Unique heat baffles assure even cooking throughout the entire oven.
- Creates an air flow that circulates the air throughout all interior surfaces of the oven cavity.
- Fast temperature recovery.
- 1/2 hp fan motor for high production cooking.
- Porcelainized oven interior for easy cleaning and provides better browning.
- Coved oven cavity corners clean easily and quickly.
- Interior oven light is controlled by a momentary switch outside the oven. Large window for viewing product at a glance.
- 4 oven racks included with 8 rack guide positions for maximum versatility.
- Easily removable rack guides provide open access for cleaning.
- Stainless steel sides, top and legs are standard.
- Extreme duty door system extends the life of the door mechanism and eliminates side-to-side shaft movement.
- Double bearings on the top and bottom of the door.
- Door locking mechanism.
- Fortified door chassis to withstand constant opening and closing.
- Handle is secured to an internal stainless steel chassis system - not to the external door finish.

IMPERIAL


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2026 Imperial Commercial Cooking Equipment | Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates.



ELECTRIC

HALF SIZE CONVECTION OVENS

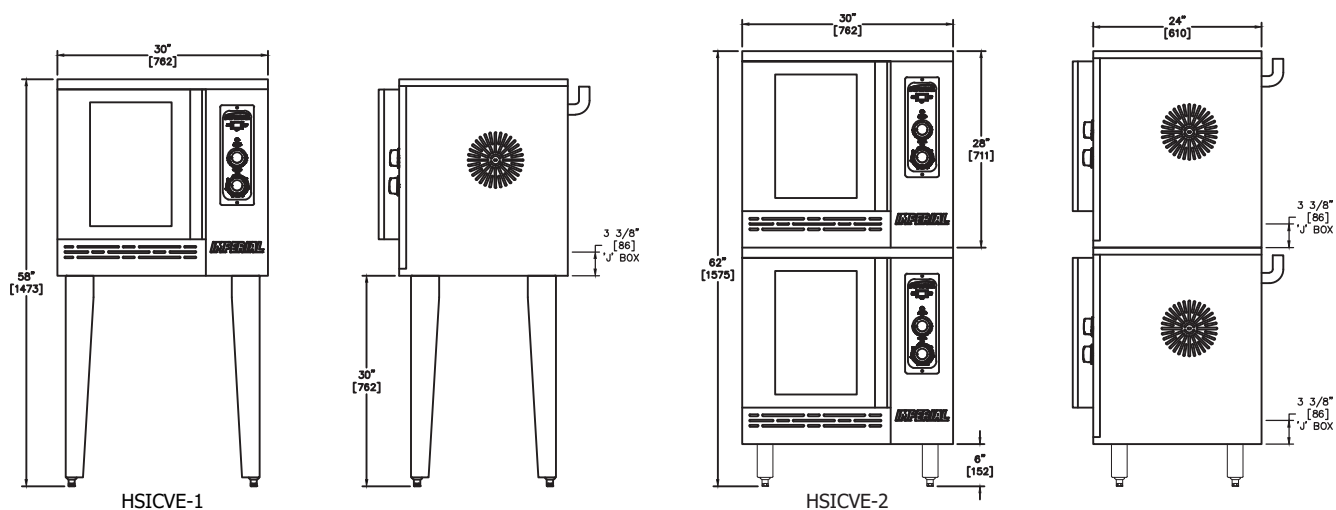

MODEL	DESCRIPTION	OVERALL DIMENSIONS			ELECTRICAL OUTPUT	SHIP WEIGHT (KG) LBS
		WIDTH	HEIGHT	DEPTH		
HSICVE-1	1/2 SIZE SINGLE OVEN	30" (762)	58" (1,473)	30" (762)	5.5 KW	(135) 297
HSICVE-1	1/2 SIZE SINGLE OVEN	30" (762)	58" (1,473)	30" (762)	8 KW	(135) 297
HSICVE-2	1/2 SIZE DOUBLE OVENS	30" (762)	58" (1,473)	30" (762)	11 KW	(215) 474
HSICVE-2	1/2 SIZE DOUBLE OVENS	30" (762)	58" (1,473)	30" (762)	16 KW	(215) 474

Notes: Measurements in () are metric equivalents. For Cook and Hold computer control feature add the suffice "-H"

ELECTRICAL REQUIREMENTS

MODEL	TOTAL KW	VOLTS	PHASE	HERTZ	AMPS
HSICVE-1	5.5	208	1	60	27 PER OVEN
		208	3		17 PER OVEN
		240	1		24 PER OVEN
		240	3		15 PER OVEN
		*480	3		8 PER OVEN
HSICVE-1	8	208	1	60	39 PER OVEN
		208	3		24 PER OVEN
		240	1		34 PER OVEN
		240	3		21 PER OVEN
		*480	3		11 PER OVEN

MODEL	TOTAL KW	VOLTS	PHASE	HERTZ	AMPS
HSICVE-2	11	208	1	60	27 PER OVEN
		208	3		17 PER OVEN
		240	1		24 PER OVEN
		240	3		15 PER OVEN
		*480	3		8 PER OVEN
HSICVE-2	16	208	1	60	39 PER OVEN
		208	3		24 PER OVEN
		240	1		34 PER OVEN
		240	3		21 PER OVEN
		*480	3		11 PER OVEN

*Additional charge

ELECTRIC CONVECTION OVEN OPTIONS

- Cook and Hold Feature
- Heavy Duty Casters, set of 4
- Stainless Steel Bottom Shelf and Adjustable Rack Supports
- Extra Standard Depth Oven Racks
- 480 volt motor
- Stainless Steel solid doors available at no additional charge. Must specify at ordering.

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2 1/4" (57 mm) overhang is required when curbmounted. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

Two speed motor - 1/2 HP, 1725/1140 RPM.



MADE IN USA



1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates