



Item No. _____

ISI-301TH

Soft Serve Freezer

Single Flavor

Icetro by Taylor Single Flavor, Gravity Fed, Hopper Agitator, Heat Treatment.

Features

Offer all the popular soft serve variations from low-to non-fat ice creams or yogurt.

Heat Treatment System

Provides a daily heating and cooling cycle to safely maintain dairy products up to 28 days before a complete disassembly and cleaning is required.

Freezing Cylinder

One, 3.4 quart (3.2 liter).

Mix Hopper

One, 18.5 quart (17.5 liter), Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

Indicator Lights

The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low. When the Mix Out light is on, the unit shuts down automatically to prevent damage.


Electronic Controls

Microprocessor touch controls are embedded. Temperatures in the hopper or freezing cylinder are displayed at any point of operation. The microprocessor maintains a creamy consistency without dispensing soft serve for up to two hours.

Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

ISI-301TH ISI30127D717

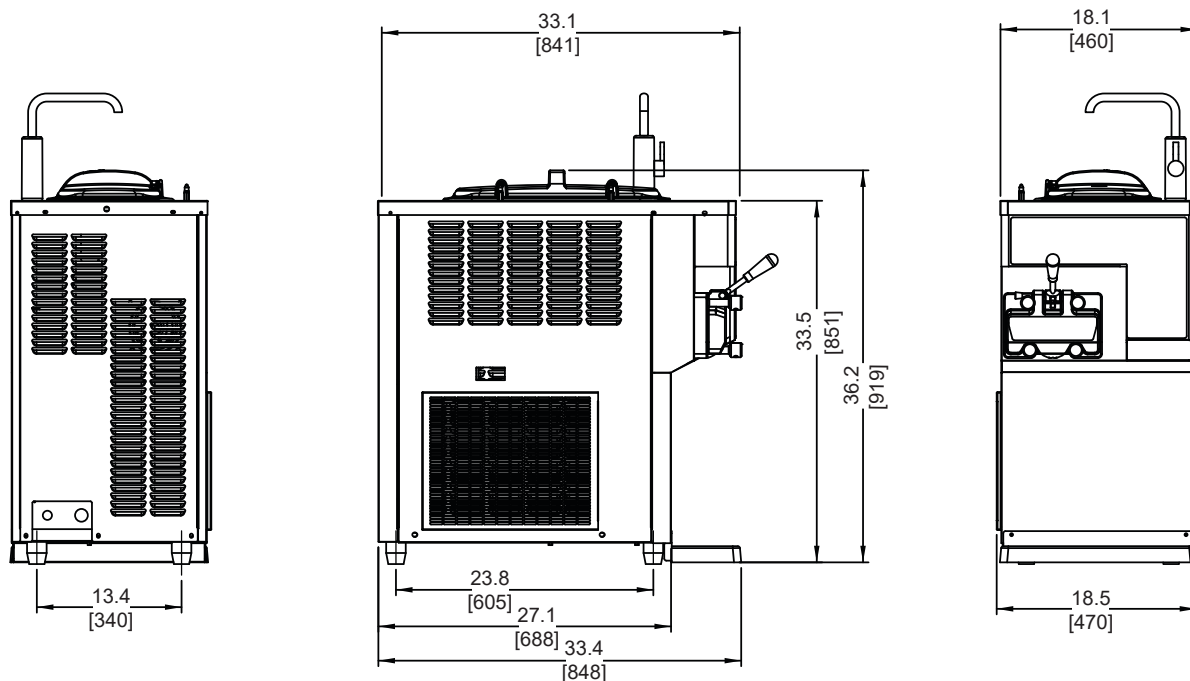

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH (1.5mm))

Weights	lbs.	kgs.
Net	309	140
Crated	383	174

*For reference only.

	cu. ft.	cu. m.
Volume	33.84	0.96
Dimensions	in.	mm.
Width	18.1	460
Depth	33.1	841
Height	36.2	919

*Designed to rest on a plastic pad directly on counter top.

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Total Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	25	19	16	2P 3W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
Neutral: ☐Yes ☐No **Cooling:** ☐Air ☐Water ☐NA

Options: _____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor Distributor.

Authorized Taylor Distributor

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult the Taylor distributor for cord and receptacle specifications.

Beater Motor

One, 1.0 HP.

Refrigeration System

Main system, one, 3,818 BTU/Hr using R404A. The main system covers Separate Hopper Refrigeration. (BTUs may vary based on application.)

BTU/hr

3,818 BTU/Hr using R404A.

Air Cooled

Minimum 7.9 in. (201 mm) on the left side, 19.7 in. (500 mm) on the right side, and 19.7 in. (500 mm) at the rear to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Accessories

Top-Mounted Cleaning water faucet with bottom Water Inlet.

Options Available, Ordered Separately

Flavor Burst compatible.



TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com