



ELECTRIC COUNTER TILTING KETTLE



- ☐ KECT-6-L
- ☐ KECT-10-L
- ☐ KECT-12-L

OPERATION SHALL BE BY:

Electrically, self-generating closed steam system equipped for operation on:

The kettle shall be equipped for operation on:

- ☐ 208 VAC, 1 or 3 phase, 50/60 Hz.
- ☐ 220 VAC, 1 or 3 phase, 50/60 Hz.
- ☐ 240 VAC, 1 or 3 phase, 50/60 Hz.
- ☐ 380/220 VAC, 3 phase, 4 wire, 50/60 Hz.
- ☐ 415/240 VAC, 3 phase, 4 wire, 50/60 Hz.
- * Phase is field convertible.

Standard Features

- Low water level cut-off and indicator
- Pressure gauge
- Solid state temperature control.
- Safety relief valve.
- Type 316 stainless steel liner.
- 2/3 steam jacket.
- 50 PSI (345 kPa) high pressure operation for higher cooking temperature.
- Integrally mounted controls.
- Removable elements.
- "Clean lock" to hold kettle in cooking position or 105° for ease of cleaning.
- Stainless steel console and trunnion.
- Water resistant construction.
- Faucet bracket

OPTIONS & ACCESSORIES AT ADDITIONAL COST

- | | | |
|---|---|---|
| ☐ Counter Steam Kettle Table (KT-) | ☐ Correction package. | ☐ Single pantry faucet with 12" swing spout, c/w bracket (SF-12) |
| ☐ 380 VAC, 3 phase, 50/60 Hz. | ☐ One piece lift-off stainless steel cover (C-) | ☐ Double pantry faucet with 12" swing spout, bracket (SF-12) |
| ☐ 415 VAC, 3 phase, 50/60 Hz. | ☐ Stainless steel perforated basket (SSB-) | ☐ Single Pantry rinse spray head, 68" hose bracket (SP-RSH) |
| ☐ 480 VAC, 3 phase, 50/60 Hz. | ☐ 21" (530 mm) high floor stand c/w sliding shelf (S-24: 6 gal. kettle, S-30: 10/12 gal. kettles) | ☐ Double pantry rinse head, 68" hose bracket (DP-RSH) |
| ☐ 600 VAC, 3 phase, 50/60 Hz. | ☐ 21" (530 mm) high floor stand c/w sliding drain pan and stationary drain (SD-24: 6 gal. kettle, SD-30: 10/12 gal. kettles) | ☐ Contour measuring strip (CMS-) |
| ☐ Etched gallon markings (GM-) | | ☐ Pour lip strainer (TKS-) |
| ☐ Etched litre markings (LM-) | | |

STANDARD CONSTRUCTION SPECIFICATIONS

Shall be a Southbend Steam model KECT-6-L, KECT-10-L or KECT-12-L, self-generating, electric, counter, tilting kettle with tilt console on the left side.

A double wall kettle interior shall form a steam jacket around the lower 2/3 of the kettle.

The jacket enclosure shall contain distilled water which is factory sealed. The bottom of the kettle shall be of hemispherical design for superior heat circulation.

The stainless steel rectangular mounting base shall include the kettle mounting lugs concealed inside the enclosure.

A removable operating handle with heat proof knob shall be mounted on each kettle.

Construction shall be of all welded #4 finish stainless steel, type 304.

The interior cooking surface shall be of type 316 stainless steel for added resistance to corrosion.

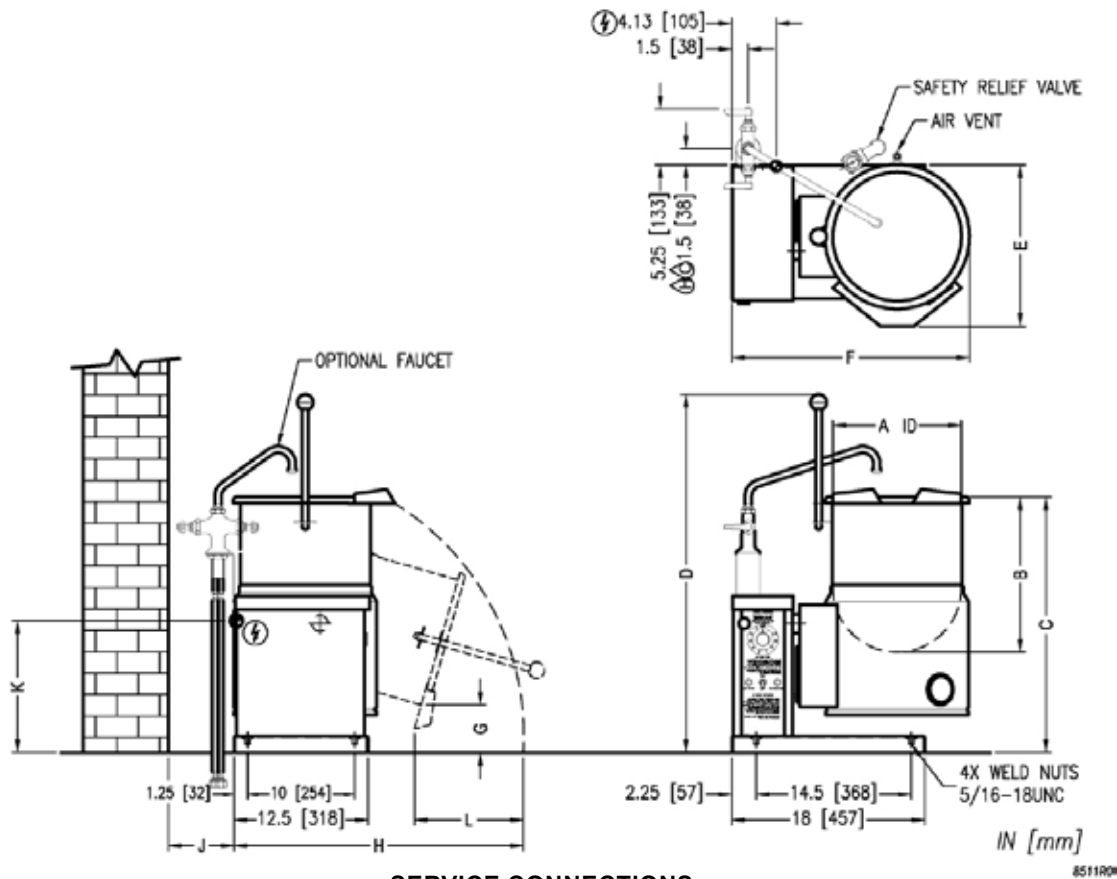
The kettle shall be ASME Code stamped, National Board Registered, c-CSA-us and NSF certified.

The controls shall be water resistant, integrally mounted and shall include a power switch, solid state thermostat, pilot light, vacuum/pressure gauge, safety valve and low water shut off with low water light for each kettle.

The kettle shall operate in a temperature range of 165°F to 285°F (74°C to 140°C) with a maximum pressure of 50 psi (345 kPa). The kettle shall be standard with removable elements.



Approval Notes: _____

**SERVICE CONNECTIONS**

- ⚡ - ELECTRICAL CONNECTIONS: to be specified on data plate
- Ⓒ - COLD WATER: 3/8" O.D. tubing to faucet (OPTIONAL)
- Ⓓ - HOT WATER: 3/8" O.D. tubing to faucet (OPTIONAL)

DIMENSIONS

Model	Capacity	Units	A	B	C	D	E	F	G	H	J	K	L
KECT-6-L	6 gallons 23 liters	in (mm)	12" (305)	14.38" (365)	24" (610)	33.5" (851)	15.25" (387)	22.25" (565)	4.50" (114)	27" (686)	4.25" (108)	12.38" (314)	10" (254)
KECT-10-L	10 gallons 38 liters	in (mm)	16" (406)	15" (381)	26" (660)	34.88" (886)	17.25" (438)	26.25" (667)	4.62" (117)	28" (711)	6.12" (156)	14.75" (375)	12.75" (324)
KECT-12-L	12 gallons 45 liters	in (mm)	16" (406)	17" (432)	28" (711)	36.88" (937)	17.25" (438)	26.25" (667)	4.12" (105)	30" (762)	6.12" (156)	14.75" (375)	12.75" (324)

ELECTRICAL CHARACTERISTICS AND SPECIFICATIONS

MODEL	PHASE	kW	AMPS PER LINE						
			208V	220V	240V	380V	415V	480V	600V
KECT-6-L	1	7.5	36.0	34.1	31.3	-	-	-	-
	3	7.5	20.8	19.7	18.1	11.4	10.4	9.0	7.2
KECT-10-L KECT-12-L	1	12.0	57.6	54.6	50.0	-	-	-	-
	3	12.0	33.3	31.5	28.9	18.3	16.7	14.5	11.5

Model	Shipping Weight	Minimum Clearance			CAPACITIES		
		Right Side	Left Side	Back	kW	US Gal.	Liters
EC-6-L	130 lbs. [59 kg]	0"	3" (76 mm)	2.5" (64 mm)	7.5	6	23
EC-10-L	180 lbs. [82 kg]	0"	3" (76 mm)	2" (51 mm)	12	10	38
EC-12-L	190 lbs. [86 kg]	0"	3" (76 mm)	2" (51 mm)	12	12	45

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**

