LINCAT OPUS ELECTRIC FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 24.0 KW

MODEL: OE8113/OP2



Opus 800

UKFry delicious food accurately with this Opus 800 Twin-Tank Free Standing Electric Fryer which comes with two independent fryer tanks for greater versatility. The fryer's two pumps boast a pumped oil system which allows the oil to be filtered and ready to use again in less than five minutes. The two-stage filtration system not only extends oil life by up to 75%, but also saves you money. With a precise thermostatic control, the fryer is ideal for a variety of busy commercial kitchens, whether it's a large pub or a restaurant. The hinged, lift out element with safety interlock makes it easy to access and clean the tank.

AIA FILE NUMBER:

ITEM NUMBER:

PRODUCT OPTIONS AND ACCESSORIES

- LK02 OPUS 350 LEG KIT
- OA8954 SPLASHGUARD FOR OPUS 800 ELECTRIC FRYERS

PRODUCT FEATURES

- Two independent fryer tanks for greater versatility
- Accurate thermostatic control up to 190Â°C for consistent results and safe operation
- Pumped oil return enables the oil to be filtered and the fryer ready for use again in less than five minutes safe and convenient
- Hinged, lift out element, with safety interlock for easy tank access and cleaning
- Oil can be filtered during or after service even whilst hot

LINCAT OPUS ELECTRIC FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 24.0 KW

MODEL: OE8113/OP2

WEIGHTS & DIMENSIONS

Product Width	600 mm
Product Depth	800 mm
Product Height	1,070 mm
Product Dimensions (WxDxH) (mm)	600 Millimeter X 800 Millimeter X 1070 Millimeter
Product Weight	118 kg
Product Clearance Required: Top	1,000 mm
Product Clearance Required: Back	100 mm
Product Clearance Required: Left Side	100 mm

SHIPPING DETAILS

Ship Width	70 cm
Ship Depth	85 cm
Ship Height	122 cm
Ship Weight	129.8 kg
Ship Method	Ltl Common Carrier
Shipping Package Type	Pieces

PRODUCT CERTIFICATION ICONS

IP24 Made in UK UKCA

ENERGY SPECIFICATIONS

Primary Energy Type	Electric
Electrical Volts	400V

ADDITIONAL TECHNICAL SPECIFICATIONS

Basket Lift Type	Not Applicable
Food Production Rate	64kg chips - 12mm [frozen], 84kg chips - 12mm [chilled] per hour
Temperature Maximum	190 °C
Total Oil Capacity (volume)	30 l
Vat 1 Oil Capacity (volume)	15 l
Vat 2 Oil Capacity (volume)	15 l

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.


Document Auto-Generated

LINCAT OPUS ELECTRIC FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 24.0 KW

MODEL: OE8113/OP2

bidding specifications

TECHNICAL DRAWING

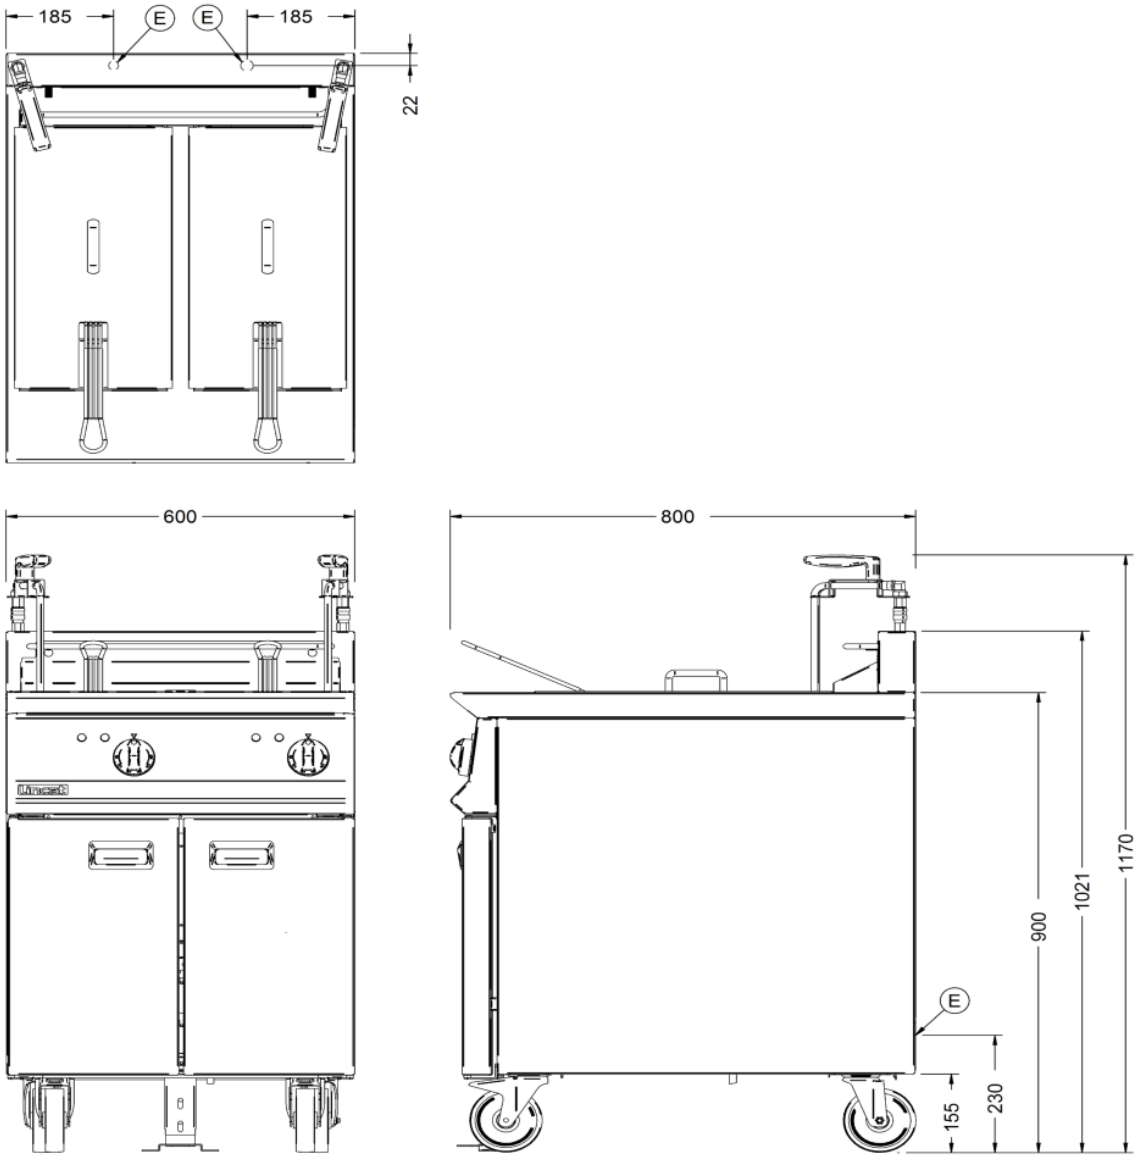

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated