LINCAT OPUS ELECTRIC COUNTER-TOP CLAM GRIDDLE - RIBBED UPPER PLATE - W 400 MM - 8.6 KW

MODEL: OE8211/R

AIA FILE NUMBER:

ITEM NUMBER:



Opus 800

UKCook flavoursome and succulent food up to three times faster than with a traditional griddle with the Opus 800 Clam Griddle with a ribbed upper plate. The method of cooking from above and below ensures that meat doesn't shrink and the juices and flavour remains locked in, and the ribbed plate adds attractive branding marks to make food look even more appetizing. Perfect for cooking steaks, burgers, chicken and other meat products, the Clam Griddle is ideal for any busy commercial kitchen. It comes with a precise thermostatic control for consistent results, while a digital timer on each clam plate ensures that you're in control.

PRODUCT OPTIONS AND ACCESSORIES

- OA8960 3 POSITION HEIGHT ADJUSTER 10-20-30 - OPUS 800
- OA8921 Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 400 mm
- OA8971 Lincat Opus 800 Free-standing Pedestal with Doors and Legs - for units W 400 mm
- TFS01 TEFLON SHEET - CLAM GRIDDLE

PRODUCT FEATURES

- Heat from above and below locks in flavour and reduces shrinkage of meat
- Cook food up to three times as quickly as a standard griddle
- Digital timer on clam plate ensures repeatable results
- Precise thermostatic control for consistent results and economical operation

LINCAT OPUS ELECTRIC COUNTER-TOP CLAM GRIDDLE - RIBBED UPPER PLATE - W 400 MM - 8.6 KW

MODEL: OE8211/R

WEIGHTS & DIMENSIONS

Product Width	400 mm
Product Depth	800 mm
Product Height	542 mm
Product Dimensions (WxDxH) (mm)	400 Millimeter X 800 Millimeter X 542 Millimeter
Product Weight	78 kg
Product Clearance Required: Top	1,000 mm
Product Clearance Required: Back	100 mm
Product Clearance Required: Left Side	100 mm

SHIPPING DETAILS

Ship Width	85 cm
Ship Depth	45 cm
Ship Height	64 cm
Ship Weight	86.35 kg
Ship Method	Ltl Common Carrier
Shipping Package Type	Pieces

PRODUCT CERTIFICATION ICONS

Made in UK UKCA IP24

ENERGY SPECIFICATIONS

Primary Energy Type	Electric
Electrical Volts	400V

ADDITIONAL TECHNICAL SPECIFICATIONS

Food Production Rate	120 x 113g [4oz] burgers [frozen] per hour
Plate Thickness	15 mm
Temperature Minimum	50 °C
Temperature Maximum	250 °C

bidding specifications


Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.


Document Auto-Generated


LINCAT OPUS ELECTRIC COUNTER-TOP CLAM GRIDDLE - RIBBED UPPER PLATE - W 400 MM - 8.6 KW

MODEL: OE8211/R

TECHNICAL DRAWING

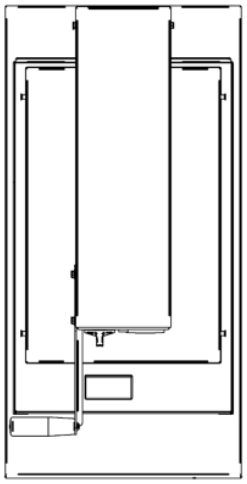

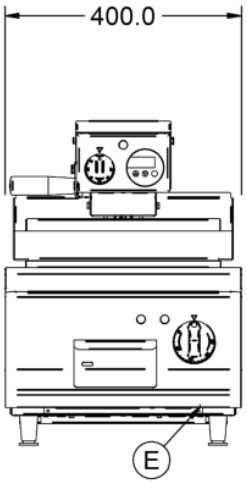

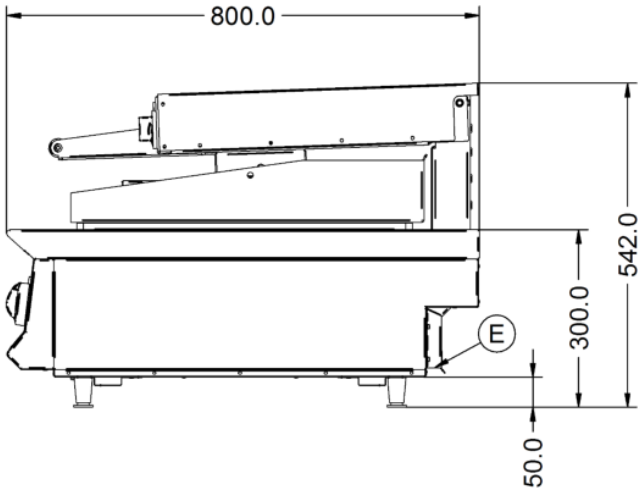

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated