LINCAT OPUS PROPANE GAS FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 32.0 KW

MODEL: OG8111/OP2/P



Opus 800

UKFry delicious food accurately with this Opus 800 Free Standing Twin-Tank Gas Fryer which comes with two independent fryer tanks for greater versatility. The fryer boasts a dual-pumped oil system which allows the oil to be filtered and ready to use again in less than five minutes. The two-stage filtration system not only extends oil life by up to 75%, but also saves you money. Ideal for a variety of busy commercial kitchens, whether it's a large pub or a restaurant, the fryer features convenient piezo ignition and has externally fired heating which allows for easy access for cleaning the tanks.

AIA FILE NUMBER:

ITEM NUMBER:

PRODUCT OPTIONS AND ACCESSORIES

- LK02 OPUS 350 LEG KIT
- OA8955 SPLASHGUARD FRYERS - OPUS 800

PRODUCT FEATURES

- Two independent fryer tanks for greater versatility
- Convenient piezo ignition
- Two stage filtration extends oil life by up to 75% and so reducing oil costs
- Pumped oil return enables the oil to be filtered and the fryer ready for use again in less than five minutes safe and convenient
- Oil can be filtered during or after service even whilst hot

LINCAT OPUS PROPANE GAS FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 32.0 KW

MODEL: OG8111/OP2/P

WEIGHTS & DIMENSIONS

Product Width	600 mm
Product Depth	800 mm
Product Height	1,070 mm
Product Dimensions (WxDxH) (mm)	600 Millimeter X 800 Millimeter X 1070 Millimeter
Product Weight	144 kg
Product Clearance Required: Front	600 mm
Product Clearance Required: Back	100 mm
Product Clearance Required: Left Side	100 mm

SHIPPING DETAILS

Ship Width	70 cm
Ship Depth	800 cm
Ship Height	122 cm
Ship Weight	158.73 kg
Ship Method	Ltl Common Carrier
Shipping Package Type	Pieces

PRODUCT CERTIFICATION ICONS

IP24 UK CA Made in UK

ENERGY SPECIFICATIONS

Primary Energy Type	Gas
Electrical Volts	230V
Electrical Total Amperage	1
Electrical Total Wattage	200
Electrical Kilowatts	32
Electrical Phase	1PH
Number of Electrical Conductor Wires	1
	Single

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated

LINCAT OPUS PROPANE GAS FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 32.0 KW

MODEL: OG8111/OP2/P

ADDITIONAL TECHNICAL SPECIFICATIONS

Basket Lift Type	Not Applicable
Food Production Rate	44kg chips - 12mm [frozen], 64kg chips - 12mm [chilled] per hour
Number of Burners	4
Temperature Maximum	190 °C
Total Oil Capacity (volume)	28 l
Vat 1 Oil Capacity (volume)	14 l
Vat 2 Oil Capacity (volume)	14 l

bidding specifications


Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated

LINCAT OPUS PROPANE GAS FREE-STANDING TWIN TANK FRYER WITH PUMPED FILTRATION - 2 BASKETS - W 600 MM - 32.0 KW

MODEL: OG8111/OP2/P

TECHNICAL DRAWING

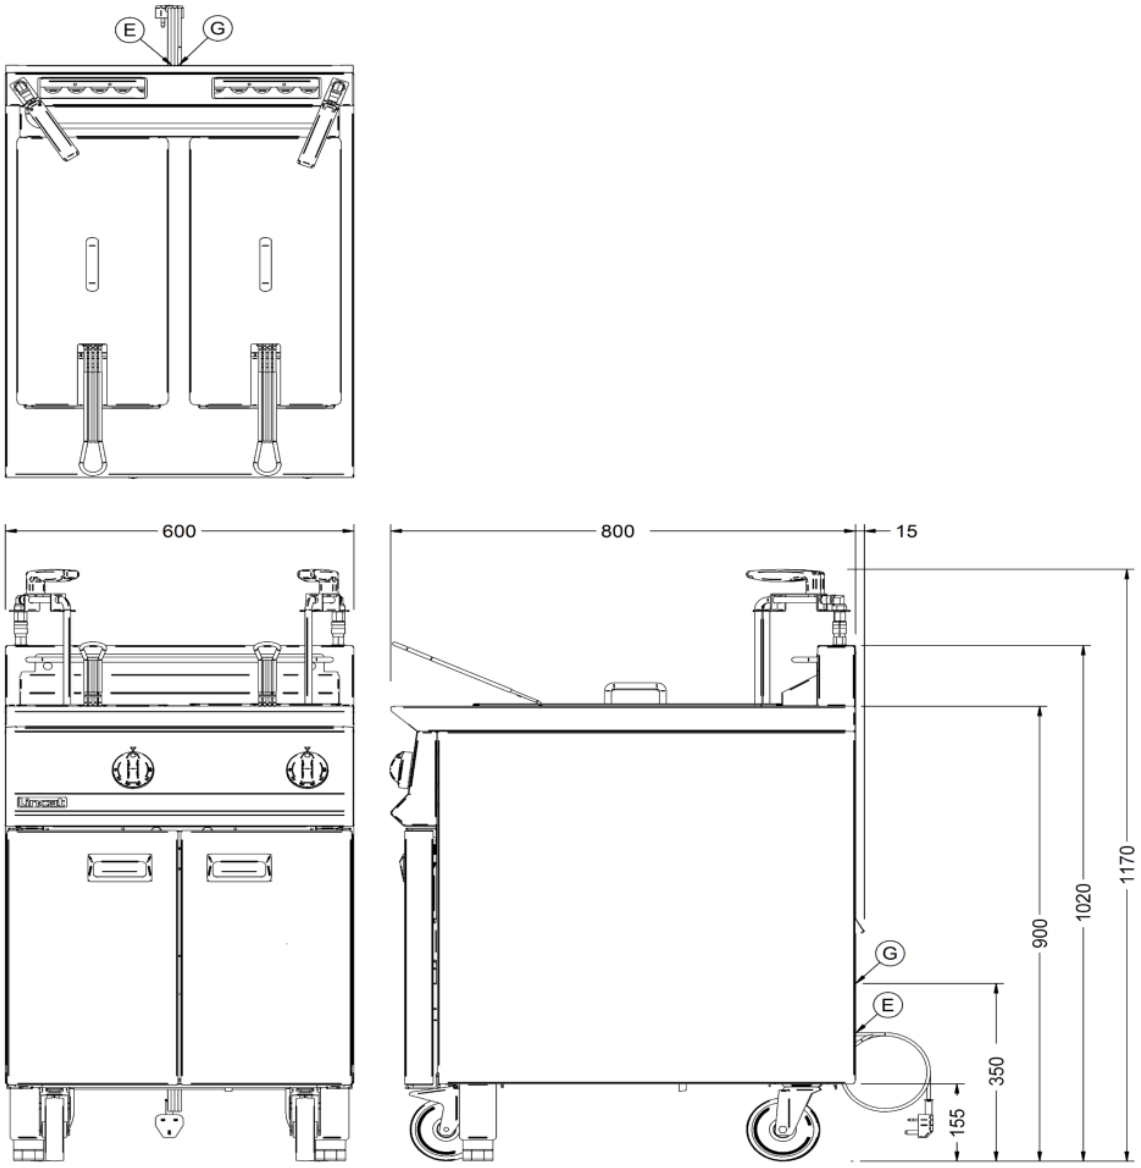

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated