LINCAT PHOENIX DUAL FUEL PROPANE GAS FREE-STANDING OVEN RANGE - 6-ZONE - W 900 MM - 36 KW [GAS] - 6 KW [ELECTRIC]

MODEL: PHDR01/P

AIA FILE NUMBER:

ITEM NUMBER:



UKBenefiting from the best of both - the focused, instant heat from the powerful gas burners, and the even cooking of the electric oven. Built to withstand the rigours of even the busiest kitchen, the large 4 x GN1/1 capacity oven is up to the task of delivering high volumes of top quality food, and enables four different foods to be cooked simultaneously. Strong and sturdy and built to last, the oven also comes with twin heavy-duty cast iron supports.

PRODUCT OPTIONS AND ACCESSORIES

- OA8902 SPLASHBACK/SHELF

PRODUCT FEATURES

- Powerful 6kW burners the pan will heat up quicker, speeding up processes such as boiling and sautéing, achieving a caramelised colour faster
- 3 shelves and 5 shelf positions maximise oven space
- Fully pressed hob
- Simpler and quicker to clean
- Twin heavy duty cast iron supports, built to withstand the rigours of the busiest kitchen
- Castors supplied as standard, not as a chargeable extra
- Low flue, hob top accommodates larger pans
- Powerful 6kW twin fan assisted oven for more even cooking. Large 4 x GN1/1 capacity enabling four different foods to be cooked simultaneously

LINCAT PHOENIX DUAL FUEL PROPANE GAS FREE-STANDING OVEN RANGE - 6-ZONE - W 900 MM - 36 KW [GAS] - 6 KW

MODEL: PHDR01/P

WEIGHTS & DIMENSIONS

Product Width	900 mm
Product Depth	800 mm
Product Height	900 mm
Product Dimensions (WxDxH) (mm)	900 Millimeter X 800 Millimeter X 900 Millimeter
Product Weight	125 kg
Product Clearance Required: Top	1,000 mm
Product Clearance Required: Back	50 mm
Product Clearance Required: Left Side	50 mm

SHIPPING DETAILS

Ship Width	100 cm
Ship Depth	85 cm
Ship Height	105 cm
Ship Weight	137.5 kg
Ship Method	Ltl Common Carrier
Shipping Package Type	Pieces

PRODUCT CERTIFICATION ICONS

Made in UK UKCA IPX4

ENERGY SPECIFICATIONS

Electrical Volts	230-400V
Electrical Total Amperage	26.1
Electrical Amps Per Conductor	Single Phase 26.1/Three Phase L1=8.7; L2=8.7; L3=8.7
Electrical Total Wattage	6,000
Electrical Kilowatts	6
Number of Electrical Conductor Wires	1

	Single,Three
Gas Total BTUs	122,832
Gas Inlet Size	0.75
Gas Inlet Pressure Required	37
Gas Consumption at Max Use Per Hour	2.58
Total Heat Input at Max Use	36 Kw, 122832 BTU per hour

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated

LINCAT PHOENIX DUAL FUEL PROPANE GAS FREE-STANDING OVEN RANGE - 6-ZONE - W 900 MM - 36 KW [GAS] - 6 KW

MODEL: PHDR01/P

ADDITIONAL TECHNICAL SPECIFICATIONS

Number of Burners	6
Oven Power Rating	6 kW
Oven Temperature Minimum	40 °C
Oven Temperature Maximum	250 °C
Shelf Depth	512 mm
Shelf Width	710 mm

SELECT_COOKING_EQUIPMENT	NUMBER_OF	POWER_RATING	ARRANGE-MENT_LEFT_OR_RIGHT	WIDTH	DEPTH
Sealed_Burner	6	6kw	Center	300 mm	300 mm

SELECT_BASE_EQUIPMENT	NUMBER_OF	CAPACITY	WIDTH	DEPTH	HEIGHT
Standard_Oven_1	1		715 mm	530 mm	400 mm

bidding specifications


Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

www.lincat.co.uk | p: +44 1522 875500 Whisby Road, Lincoln, LN6 3QZ, UK

LINCAT PHOENIX DUAL FUEL PROPANE GAS FREE-STANDING OVEN RANGE - 6-ZONE - W 900 MM - 36 KW [GAS] - 6 KW

MODEL: PHDR01/P

TECHNICAL DRAWING

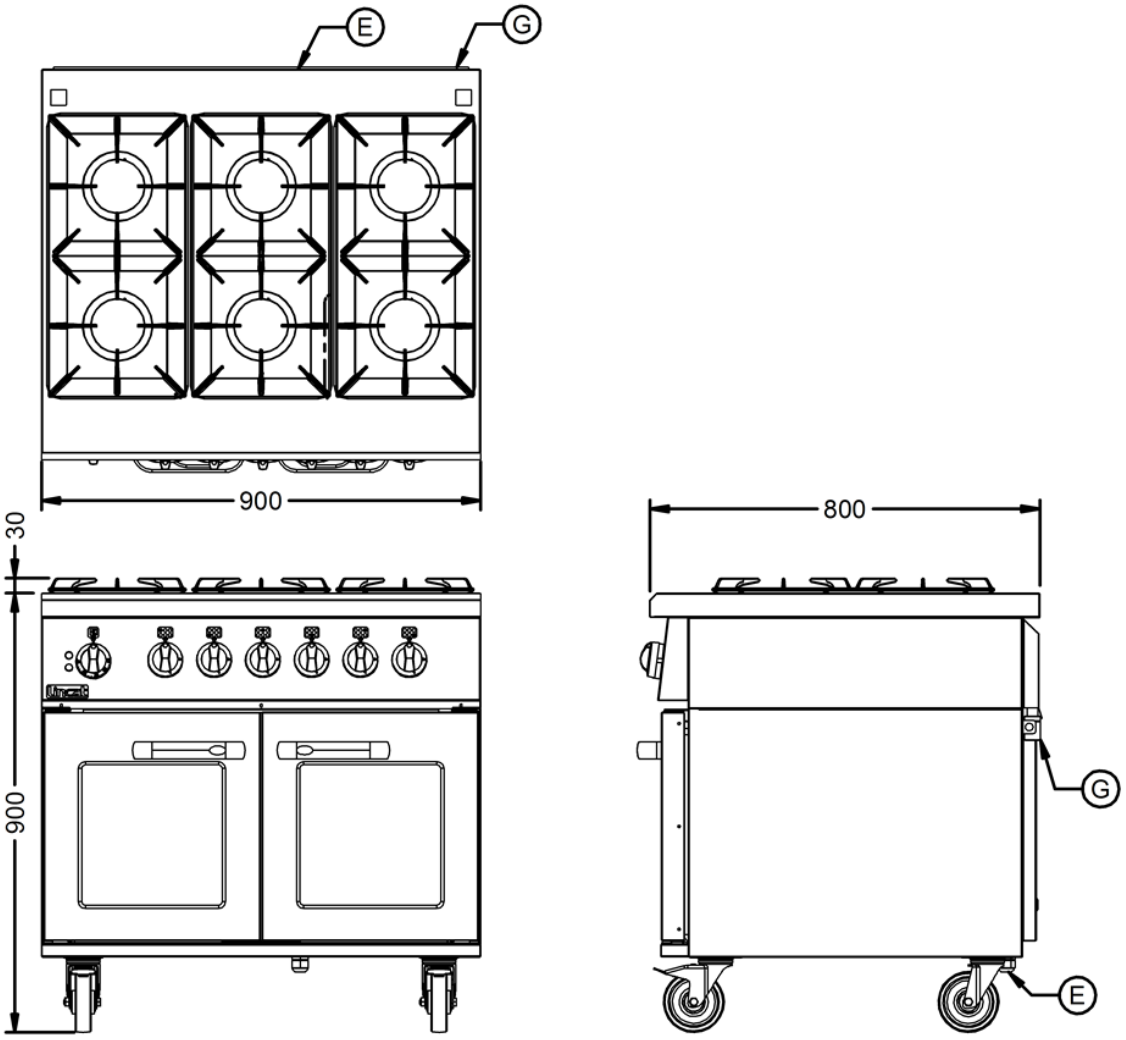

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated