

## 25 cu ft Refrigerator, Reach-In

- Improve the flow and function of your space by having refrigerated items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility



UCRE427-SS01A


Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE427-SS01A	25 cu ft Refrigerator, Reach-In, Field Reversible Hinge	115v / 60hz / 3.8	287 lb

### Specifications


UCRE427-SS01A dimensions: 80 <sup>23</sup> / <sub>32</sub> " H x 27 <sup>9</sup> / <sub>16</sub> " W x 31 <sup>1</sup> / <sub>2</sub> " D
AISI 441 stainless steel interior and exterior with lock
Autodefrost
CFC-free high-density polyurethane insulated cabinet
Environmentally friendly R290 refrigerant: 3.2 oz (0.090kg)
Electronic digital temperature control with alarms
Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P
High efficiency compressor, top mount
High efficiency evaporator coil & condenser
NSF/ANSI Standard 7 compliant
Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design
Temperature range: 28°F to 46°F
Volume of 25 cu ft
1 section, includes 3 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 <sup>3</sup> / <sub>4</sub> "	.88 lb
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 <sup>7</sup> / <sub>8</sub> " x 25 <sup>5</sup> / <sub>8</sub> " for reach-ins	7 lb
ULA89020410	Stainless steel adjustable leg kit includes 4 legs, 4 <sup>5</sup> / <sub>8</sub> " H to 7 <sup>1</sup> / <sub>8</sub> " H, M6 bolts	11.02 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb


**Front (Open)**

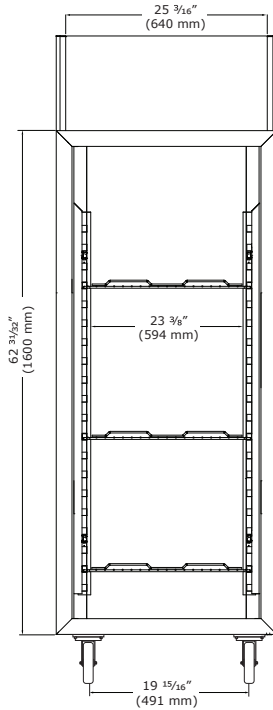


**Front (Closed)**

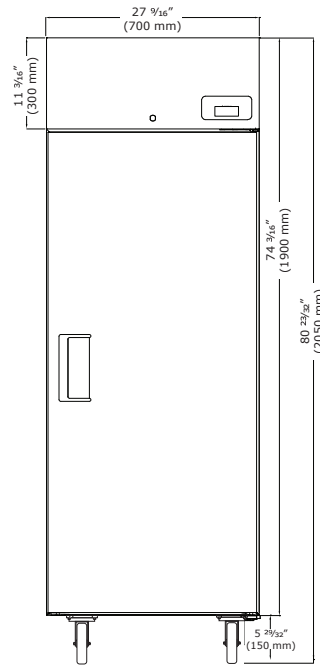

**Top**

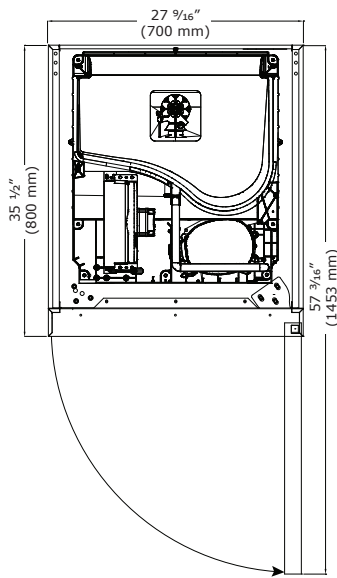

**Side**

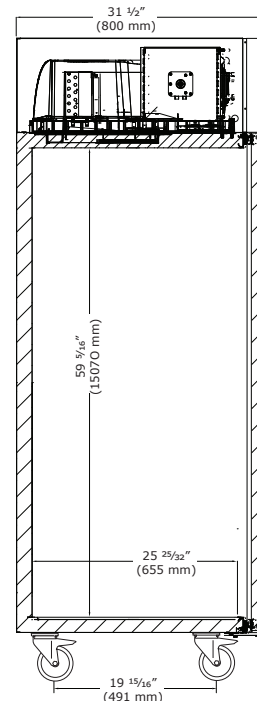

**Commercial Warranty**

3 Year (parts & labor) / 5 year sealed system (parts)  
See complete warranty for details

