

PLEXOR M2

MULTI COOK OVEN

TURBOCHEF

FEATURES

- Two (2) cooking technologies in one (1) appliance: rapid cook or impingement
- Modular design
- Operated by one (1) 50A or two (2) 30A plugs
- Intuitive One-Touch interface with customizable images
- Unlimited recipe storage
- Easily create and manage menus with the cloud-based Menu Builder by Open Kitchen
- Ventless operation powered by a UL (KNLZ) listed catalytic converter system
- Adaptive power management ensures consistent results while power sharing
- Open Kitchen from Powerhouse Dynamics connects your equipment to the cloud, offering real time, automated monitoring, predictive maintenance, over-the-air updates, and operational insights. Visit powerhousedynamics.com for more information.
- Includes single or double plug and cord (6 ft. nominal)



SPECIFICATIONS

PHASE
1 Phase

VOLTAGE
208/240V

CURRENT
30A

MAX CIRCUIT
30A X 2

PLUG (QTY 2)
NEMA 6-30P




PHASE
1 Phase

VOLTAGE
208/240V


CURRENT
50A

MAX CIRCUIT
50A

PLUG
NEMA 6-50P

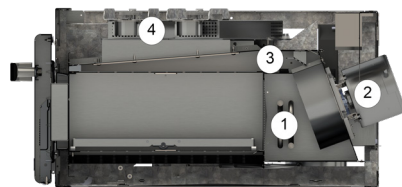

- Rapid Cook Module**
1. Heating Elements
 2. Blower Motor
 3. Catalytic Converter
 4. Top-launched Microwave

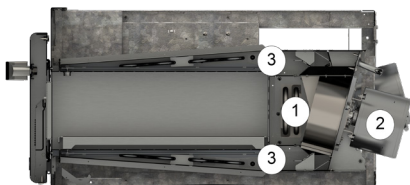

- Impingement Module**
1. Heating Elements
 2. Blower Motor
 3. Catalytic Converters



This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method.


* Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations. It is the responsibility of the owner to supply voltage to the unit according to the specifications on the back of this sheet.

† Ventless certification is for all food items except for foods classified as “fatty raw proteins.” Such foods include raw bone-in, skin-on chicken, raw hamburger meat, raw bacon, raw sausage, raw steaks, etc. If cooking these types of foods, consult local HVAC codes and authorities to ensure compliance with ventilation requirements.

Ultimate ventless allowance is dependent upon AHJ approval, as some jurisdictions may not recognize the UL certification or application. If you have questions regarding ventless certifications or local codes please call 1-800-908-8726.

TurboChef reserves the right to make substitutions of components or change specifications without prior notice.

DOC-1832 / Rev T / September 2025

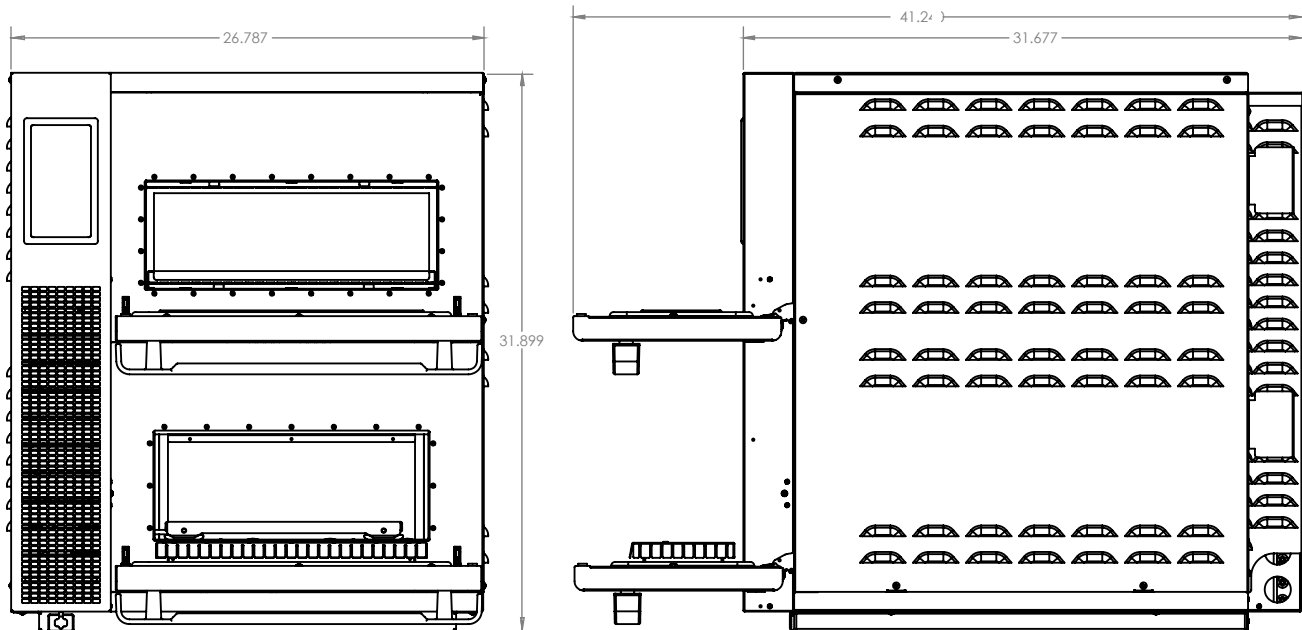

DIMENSIONS

Height	31.89"	810 mm
Width	26.79"	680 mm
Depth	31.67"	804 mm

WALL CLEARANCE

Top	5"	127 mm
Sides	2"	51 mm
Back	2"	51 mm

RAPID COOK CHAMBER

Height	6.14"	156 mm
Width	15.5"	394 mm
Depth	15.42"	392 mm
Volume	0.85 cu.ft.	24.1 liters

SHIPPING

Oven Only	175 lb.	79 kg
Shipping Weight	400 lb.	181 kg
F.O.B.	Carrollton, TX	
Box Size	37" x 32" x 35" (940 mm x 813 mm x 889 mm)	
Item Class	100	

IMPINGEMENT CHAMBER

Height	6"	153 mm
Width	16.5"	419 mm
Depth	16.5"	419 mm
Volume	0.95 cu.ft.	27 liters

U.S.: All ovens shipped within the U.S. are packaged in a double-wall corrugated box banded to a wooden skid.

International: All ovens shipped by air or less than container load are packaged in wooden crates. Crates are charged at an additional cost.


International LCL: Crates are optional (recommended) at additional cost.

*Under normal operation, the oven will not exceed the max input value.

⚠ TurboChef recommends installing a type D circuit breaker for European installations.

⚠ IMPORTANT: If the oven is placed near a grill or stove, a divider must exist between the oven and the open heat source, with a minimum of 6" (153 mm) between the oven and the divider. If the oven is placed near a fryer, a divider must exist between the oven and fryer, with a minimum of 12" (305 mm) between the oven and the divider.

STANDARD CONFIGURATION

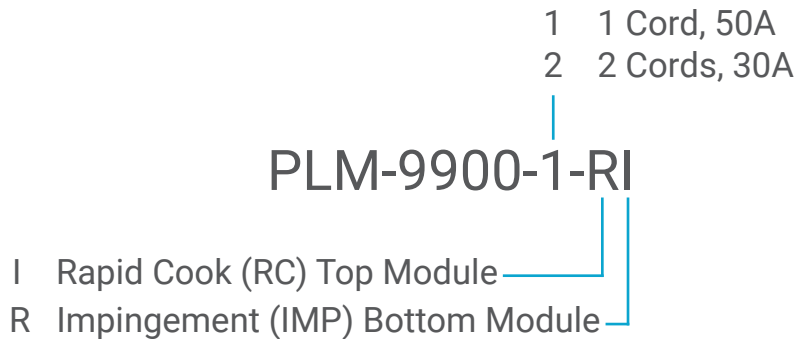

PART NUMBER	DESCRIPTION
PLM-9900-1-II	OVEN, PLEXOR, M2, 208/240V, 1PH, 50A, IMP/IMP
PLM-9900-1-RI	OVEN, PLEXOR, M2, 208/240V, 1PH, 50A, RC/IMP
PLM-9900-1-RR	OVEN, PLEXOR, M2, 208/240V, 1PH, 50A, RC/RC
PLM-9900-2-II	OVEN, PLEXOR, M2, 208/240V, 1PH, DUAL CORD, 2X 30A, IMP/IMP
PLM-9900-2-RI	OVEN, PLEXOR, M2, 208/240V, 1PH, DUAL CORD, 2X 30A, RC/IMP
PLM-9900-2-RR	OVEN, PLEXOR, M2, 208/240V, 1PH, DUAL CORD, 2X 30A, RC/RC

STANDARD INCLUDED ACCESSORIES

PART NUMBER	INCLUDED ACCESSORIES
PLM-9900-1-II	105596 (Qty 2), 105597 (Qty 2), 105702 (Qty 1), NGC -1478 (Qty 1)
PLM-9900-1-RI	105598 (Qty 4), 105702 (Qty 1), NGC -1478 (Qty 1)
PLM-9900-1-RR	105596 (Qty 1), 105597 (Qty 1), 105598 (Qty 2), 105702 (Qty 1), NGC -1478 (Qty 1)
PLM-9900-2-II	105596 (Qty 2), 105597 (Qty 2), 105702 (Qty 1), NGC -1478 (Qty 1)
PLM-9900-2-RI	105598 (Qty 4), 105702 (Qty 1), NGC -1478 (Qty 1)
PLM-9900-2-RR	105596 (Qty 1), 105597 (Qty 1), 105598 (Qty 2), 105702 (Qty 1), NGC -1478 (Qty 1)

ACCESSORY PART NUMBER	DESCRIPTION
105596	15.5" x 15.5" x 0.5" Solid Teflon Basket
105597	15.5" x 15.5" x 0.5" Perforated Teflon Basket
105598	12.65" x 13.25" x 0.375" Solid Teflon Basket
105702	Oven Cleaner Starter Kit
NGC -1478	Aluminum Paddle