

V-Series 60 Qt. Mixer

The kitchen workhorse, for a wide range of heavy-duty mixing applications.



V60

MODELS

☐ **V60** 60 qt. Standard ☐ **V60PL** 60 qt. Power Lift

STANDARD FEATURES

- Stainless steel top cover, planetary cover, bayonet shaft, bowl guard and legs
- IP32 rated
- Powerful 3 HP motor with variable speed drive and agitator speed range from 53 RPMs to 288 RPMs
- #12 attachment hub with 198 RPM speed
- No bowl adapters required for down-sizing bowls
- Hydraulic damper for easier bowl lowering, and single lever manually raises bowl and locks into position (V60)
- Front-mounted controls with 90-minute digital timer and emergency stop
- Power bowl lift (V60PL only)
- Durable powder coated finish on legs and outer surfaces not constructed of stainless steel
- High torque transmission
- Permanently lubricated planetary head & attachment hub case
- Bowl scraper bracket affixes to planetary head
- Grease lubricated, anti-friction ball bearings
- Patent-pending interlock prevents operation if guard is opened or bowl is lowered
- Overload protection and no volt release
- Non-skid rubber feet
- 6 foot cord
- ETL and NSF listed
- Made in Denmark

STANDARD ACCESSORIES

- **VBOWL-60** – Stainless steel bowl
- **VBEAT-60SS** – Stainless steel flat beate
- **VWHIP-60** – Stainless steel wire whip
- **VHOOK-60** – Stainless steel dough hook
- **VCHUTE-60** – Stainless steel ingredient chute

WARRANTY

- **NEW!** Four-year parts & labor limited warranty

OPTIONAL ACCESSORIES/ATTACHMENTS

- 30 qt. bowl and attachments
- Bowl scraper - 30 qt. or 60 qt. options
- Bowl truck
- Stainless steel and Marine models

To select options see back




ETL listed
Conforms to UL Std 763
Certified to CSA Std C22.2 No. 195

Intertek

Approved by: _____

Date: _____

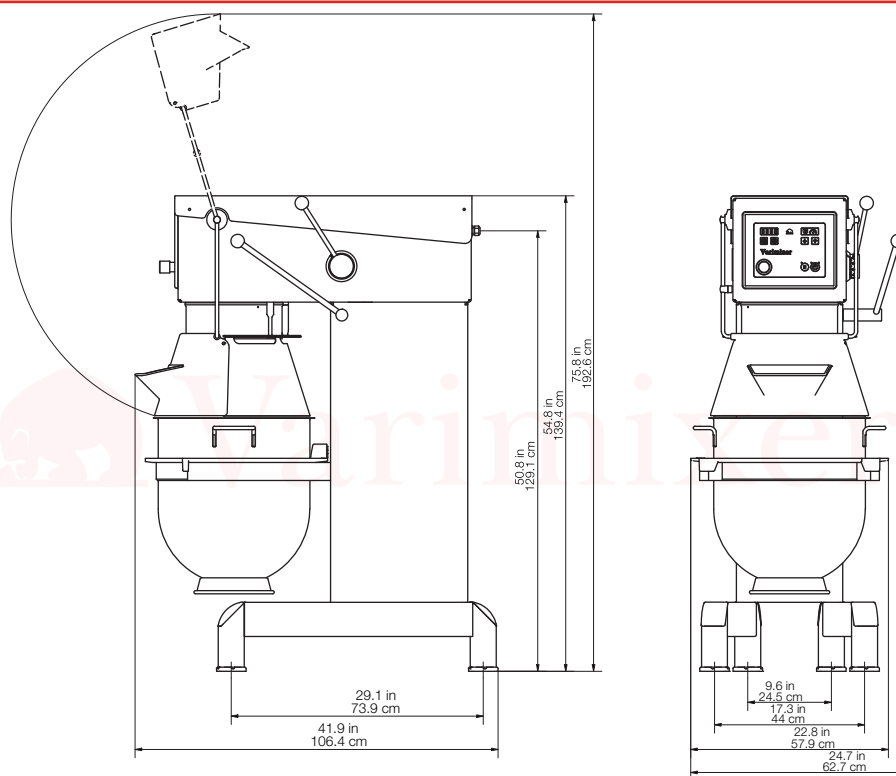

SPECIFICATIONS

Model	Motor	Volts	Amp	Plug Type	Mixing Speeds	Hub Speeds	IP Rating
V60	3 HP	208/60/1	14	--	53 - 288 RPMs	198 RPMs	IP32
V60PL	3 HP	208/60/3	9.5	--	53 - 288 RPMs	198 RPMs	IP32

Delivered without plug. Specify voltage when ordering.

DIMENSIONS | SHIPPING INFORMATION

Reinforced carton for shipping. This product ships on a pallet. See dimensions below.

Model	Overall Dimensions	Net Wt.	Shipping Dimensions	Ship Wt.	Freight Class
V60 / V60PL	25.5" W x 40.5" D x 55.625" H (64.77 cm x 102.8 cm x 141.29 cm)	606 lbs. (275 kg)	42.5" W x 27" D x 61.4" H (108 cm x 68.6 cm x 156 cm)	650 lbs. (294.8 kg)	70 64 CU ft.

OPTIONAL/ADDITIONAL ACCESSORIES

- | | |
|--|--|
| ☐ VBTRUCK-60 60 qt. bowl truck | ☐ VWHIP30-60 30 qt. wire whip |
| ☐ VBTRUCK30-60 30 qt. bowl truck | ☐ VWINGWHIP30-60 30 qt. wire whip |
| ☐ VWINGWHIP-60 60 qt. wire whip | ☐ VHDWHIP30-60 30 qt. heavy-duty whip |
| ☐ VHDWHIP-60 60 qt. heavy-duty whip | ☐ XMCA-SS Meat grinder hub assembly |
| ☐ VSCRIP-60 60 qt. scraper | ☐ XSVGH Slicer/Shredder housing |
| ☐ VBOWL30-60 30 qt. bowl | ☐ XSP Slicing plate |
| ☐ VSCRIP30-60 30 qt. scraper | ☐ L00783 Strip cutter |
| ☐ VHOOK30-60 30 qt. hook | ☐ L00670 Meat tenderizer |
| ☐ VBEAT30-60 30 qt. beater | |

Heavy-duty 60 qt. mixer with 3 HP motor and variable speed drive with agitator speed range from 53 to 288 RPMs. #12 attachment hub with 198 RPM speed. Stainless steel top cover, bayonet shaft and bowl guard. Non-stainless steel surfaces powder coated finish. Front-mounted controls with 90-minute digital timer. Bowl lowering lever with hydraulic damper. Permanently lubricated planetary head and attachment hub case. 6 ft. cord. Mixer is IP32 rated with ETL and NSF certification. Four-year parts and labor limited warranty.