



15" W. UNDERCOUNTER CLEAR ICE MACHINE

Viking 5 Series – Builder Select Model – VBFIC

PROFESSIONAL FEATURES

- BrightShield™ antimicrobial lighting creates a more hygienic environment for ice
- Produces 3/4" clear ice cubes
- Produces up to 39 lbs. of clear ice daily
- Stores up to 28 lbs. of ice
- Ice scoop included with dedicated holder
- Factory-installed drain pump included
- Digital controls feature audible alerts and programmed cleaning reminders
- Audible alerts, cleaning reminders and Sabbath Mode
- Arctic white LED light
- Elegant midnight black interior



VBFIC1152D

MODEL NUMBER

- VBFIC1152D – 15" Undercounter Clear Ice Machine
Solid Panel Ready

ACCESSORIES

- PDPUS215SS – Professional Door Panel, Stainless Steel
- CDPUS215SS – Classic Door Panel, Stainless Steel

DESIGN OPTIONS

- Reversible door allows for right or left swing
- Choice of two accessory door handles for each unit
 - Professional Door Panel features the iconic Viking handle for true design integrity
 - Classic Door Panel features a slim handle that coordinates with any kitchen design

WARRANTY

- 1-year full covers complete unit
- 90-day full – cosmetic parts such as glass, painted items, and decorative items
- 5-year limited – sealed refrigeration system




15" W. UNDERCOUNTER CLEAR ICE MACHINE

Viking 5 Series – Builder Select Model – VBFIC

15" W. UNDERCOUNTER CLEAR ICE MACHINE WITH PUMP	
DESCRIPTION	VBFIC1152D
Overall Width	14-7/8" (37.8 cm)
Overall Height	33-3/4" to 34-3/4" (85.7 cm to 88.3 cm)
Overall Depth from Rear	To front of door: 23-5/8" (60 cm) To handle: 25-1/2" (64.8 cm) With door at 90° angle: 37-3/8" (94.9 cm)
Electrical Requirements	115V/60Hz/15A
Maximum Amp Usage	3.0 amps
Maximum Storage Capacity	5.5 cu. ft.
Cord Length	6 ft.
Interior Finish	Black
ENERGY STAR	No
Panel Height	29-21/32" (75.4 cm)
Panel Thickness	5/8" (1.6 cm) or 3/4" (1.9 cm)
Panel Type	2-3/4" (7 cm) Solid Panel
Panel Width	14-3/4" (37.5 cm)
Refrigerant Type	R600a
Sabbath Mode	Yes
Shipping Dimensions	19" W. x 31" D. x 37" H.
Approximate Shipping Weight	125 lbs.

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

Rough-In Opening Dimensions			Cabinet Dimensions					
A	B	C	D	E	F	G	H	I
15" (61 cm)	34" to 35" (86.4 to 88.9 cm)	24" (61 cm)	14-7/8" (37.8 cm)	33-3/4" to 34-3/4" (85.7 to 88.3 cm)	23-5/8" (60.0 cm)	25-1/2" (64.8 cm)	37-3/8" (94.9 cm)	16-5/8" (42.2 cm)

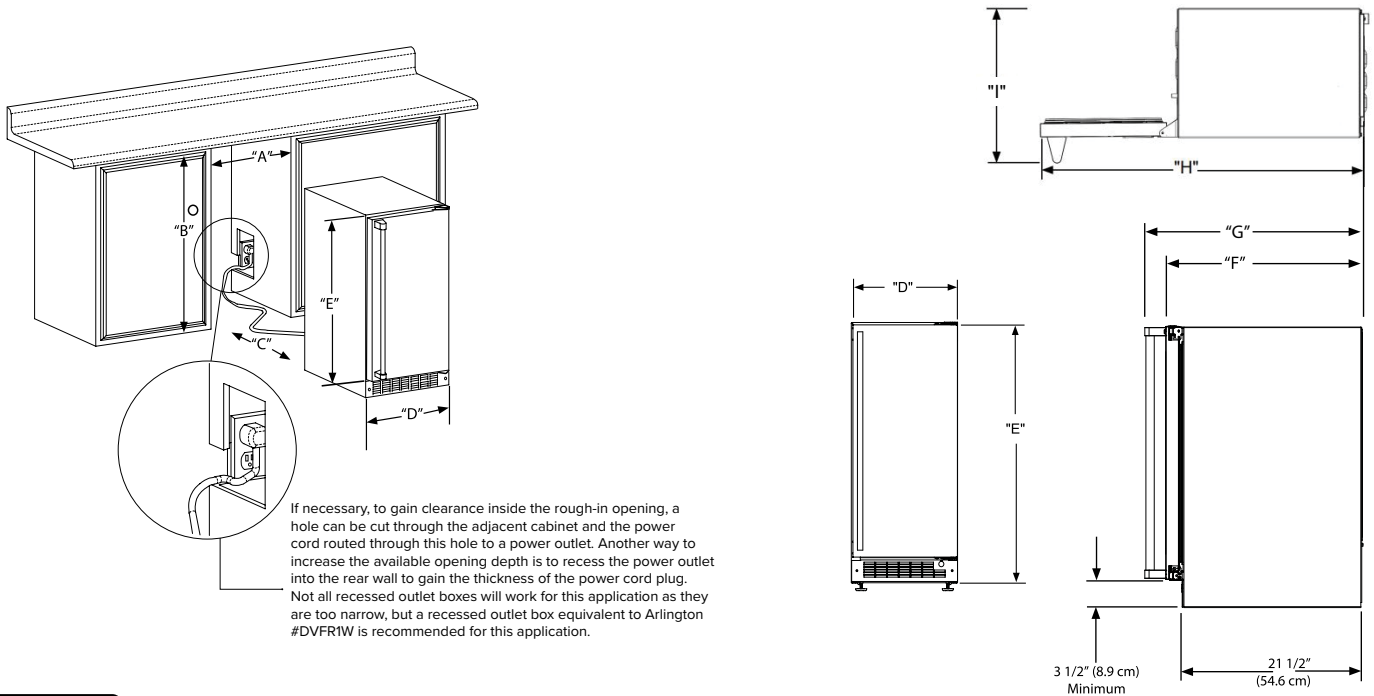

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com

© 2025 Viking Range, LLC All rights reserved. Specifications subject to change without notice.