



Product Specifications

Configurable Back Bar Refrigeration

- Customize for your operation with refrigeration in a variety of sizes and selections including condenser location, solid and glass door configurations, and direct draw options
- Back bar refrigerators offered in 32", 52", 72", and 92" with additional customizations like condenser location and solid and glass door combinations.
- Field reversible door(s) with lock(s)
- Casters or legs sold as an accessory



VCBR532-SS01A



VCBR552-SS01A



VCBR572-SS01A



VCBR592-SS01A



VCBR532-SG01A



VCBR552-SG01A



VCBR572-SG01A



VCBR592-SG01A



VCBR652-SS01A*



VCBR672-SS01A*



VCBR692-SS01A*

*Tap tower ready. Tap towers sold separately.

Model	32" Models	52" Models	72" Models	92" Models
Dimensions	34 9/16" H x 32" W x 24 3/4" D	34 9/16" H x 52" W x 24 3/4" D	34 9/16" H x 72" W x 24 3/4" D	34 9/16" H x 92" W x 24 3/4" D
Internal Volume	6.25 cu ft	12.52 cu ft	19.74 cu ft	28.5 cu ft
Refrigerant	R600a (2.12 oz)	R290 (4.06 oz)	R290 (4.06 oz)	R290 (4.06 oz)

Specifications

Adjustable coated wire shelves (not included on direct-draw models)
Adjustable bright white or blue LED lighting
Automatic defrost
Convection cooling system provides a quick cool down and consistent temperature
High efficiency compressor
NSF/ANSI Standard 7 compliant
Temperature range: 33°F - 70°F



Product Specifications

Configurable Back Bar Refrigeration

Model	Description	Voltage/Hz	Shipping Weight
VCBR532-SS01A	32" Back Bar, 1 Solid Door, Lock, Condenser Right, 3 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	302 lb
VCBR552-SS01A	52" Back Bar, 2 Solid Doors, Locks, Condenser Right, 6 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	382 lb
VCBR572-SS01A	72" Back Bar, 3 Solid Doors, Locks, Condenser Right, 9 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	496 lb
VCBR592-SS01A	92" Back Bar, 4 Solid Doors, Locks, Condenser Right, 12 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	542 lb
VCBR532-SG01A	32" Back Bar, 1 Glass Door, Lock, Condenser Right, 3 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	302 lb
VCBR552-SG01A	52" Back Bar, 2 Glass Doors, Locks, Condenser Right, 6 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	382 lb
VCBR572-SG01A	72" Back Bar, 3 Glass Doors, Locks, Condenser Right, 9 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	496 lb
VCBR592-SG01A	92" Back Bar, 4 Glass Doors, Locks, Condenser Right, 12 Wire Shelves, Solid Top, Stainless Steel	115v / 60hz	542 lb
VCBR652-SS01A	52" Back Bar, 2 Solid Doors, Locks, Condenser Right, 1 Tap & Drain Hole, Stainless Steel	115v / 60hz	382 lb
VCBR672-SS01A	72" Back Bar, 3 Solid Doors, Locks, Condenser Right, 2 Taps & Drain Holes, Stainless Steel	115v / 60hz	496 lb
VCBR692-SS01A	92" Back Bar, 4 Solid Doors, Locks, Condenser Right, 2 Taps & Drain Holes, Stainless Steel	115v / 60hz	542 lb


Accessories	Description	Shipping Weight
ULACOMLEGS4	4, 6" Adjustable leveling legs for 32" and 52" Models	10 lb
ULACOMLEGS6	6, 6" Adjustable leveling legs for 72" and 92" Models	14 lb
ULACOMCASTERS4	4, 6" Casters for 32" and 52" Models	12 lb
ULACOMCASTERS6	6, 6" Casters for 72" and 92" Models	17 lb
ULATAPSINGLE	Single Beer Tap Tower Kit	20 lb
ULATAPDOUBLE	Double Beer Tap Tower Kit	24 lb
ULABACKBARCOFFEE2	2 Tap Nitro Coffee Kit	10 lb
ULABACKBARCOFFEE3	3 Tap Nitro Coffee Kit	11 lb
ULABACKBARCOFFEE4	4 Tap Nitro Coffee Kit	12 lb




Product Specifications

Configurable Back Bar Refrigeration


32" Models




52" Models

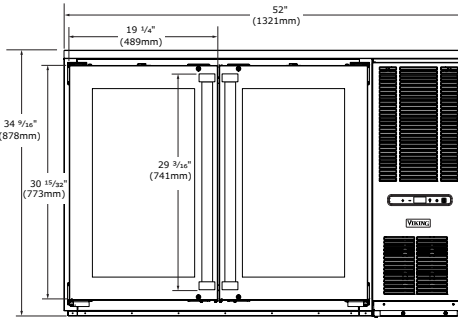


72" Models

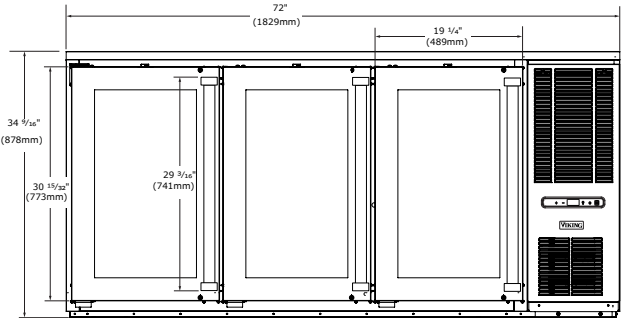


92" Models

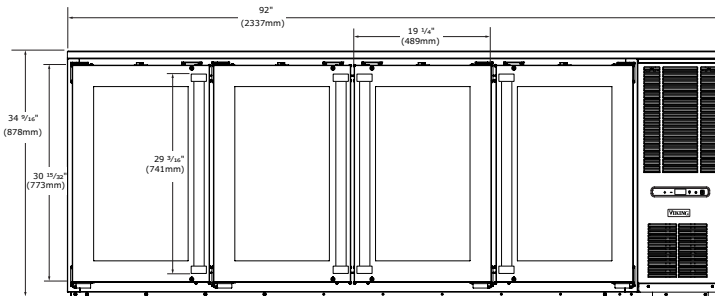

Side

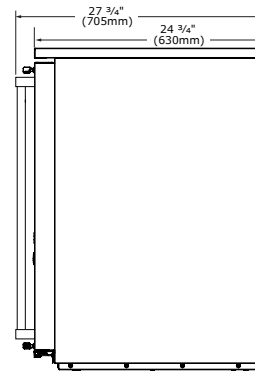


Top

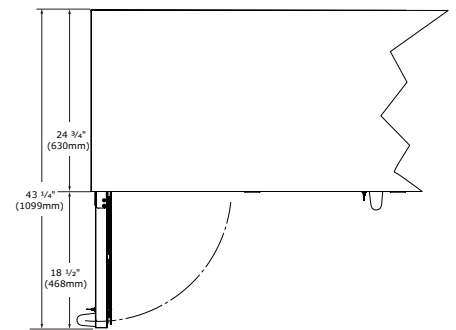


Tower 2 3/4" (70 mm)/Drain 1" (25 mm) Location


52" Models

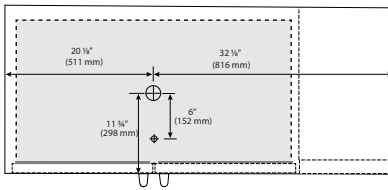


72" Models

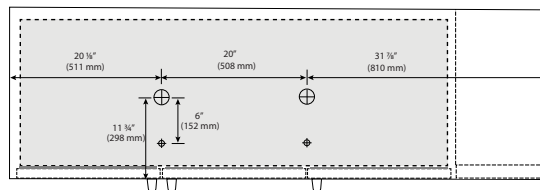

92" Models

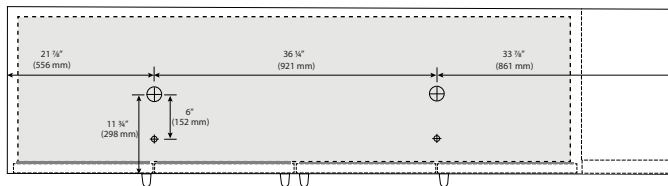

Back Panel

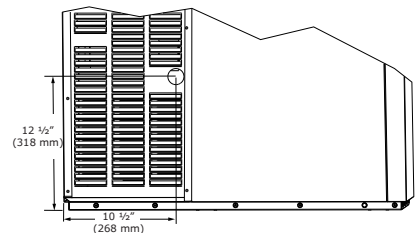

Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

Notes

- Dimensions/image shown are for refrigeration unit on right

vikingrange.com/commercial

All specifications are subject to change without notice.

THE MIDDLEBY CORPORATION