

Project Name: _____ AIA#: _____

Model #: _____ Location: _____

SIS#: _____ Item #: _____ Quantity: _____



60 Quart Planetary Floor Mixer with Power Bowl Lift

Enhanced to handle a variety of mixes!

Utilizing 4 speeds, operator-friendly power bowl lift and front-mounted touch pad control panel with digital timer and heavy duty transmission.



Model

☐ SP62P-4

Standard Features

- Powerful 3 HP fixed speed custom built motor
- Direct gear-driven, high-torque transmission
- Heat-treated hardened steel alloy gears and shafts
- Four fixed speeds
- Handles up to 50 lbs. of flour (80 lb. batch size)
- Safety interlocked power bowl lift
- Permanently lubricated oil bath transmission
- Thermal overload protection
- Front-mounted touch pad controls with 60-minute digital timer and last-batch recall
- Stainless steel, interlocking bowl guard with built-in, fully welded ingredient chute
- Heavy duty bowl truck
- Rigid cast iron body
- Industry standard #12 attachment hub
- NSF approved enamel gray paint
- 6-foot cord and ground plug
- Auto shut off, for improved protection of motor and transmission protection

Standard Accessories/Attachments

- 60 qt. stainless steel bowl (#304 series)
- Aluminum spiral dough hook, flat beater and stainless steel whip
- Non-slip rubber feet
- Bowl truck

Warranty

- Two years parts and labor

Optional Attachments/Accessories

- Seismic flange kit
- Slicer/shredder/grater for #12 hub
- Meat grinder for #12 hub
- Meat tenderizer for #12 hub
- Strip cutter for #12 hub
- Bowl Scraper
- Additional bowl truck
- Correctional package
- Extended warranty

To select options see back




Approved by: _____ Date: _____



60 Quart Planetary Floor Mixer

SP62P-4

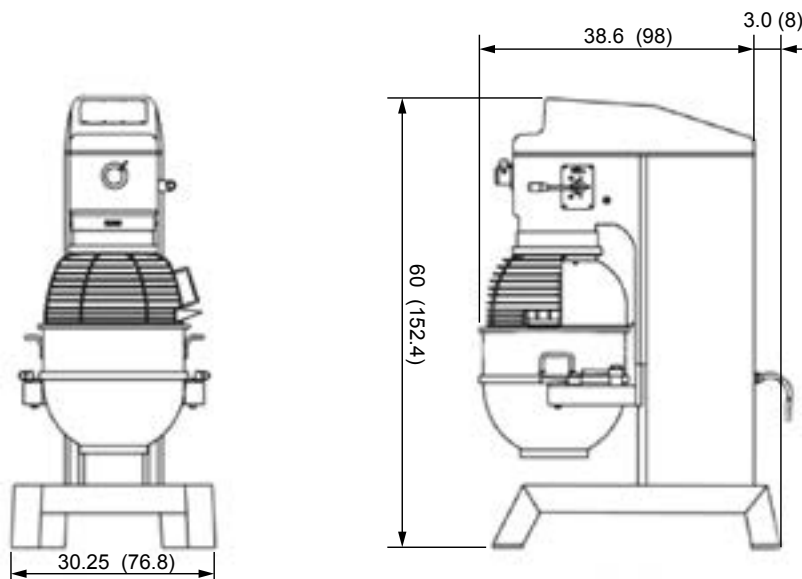

SPECIFICATIONS

Model	Motor	Volts	Amps	Transmission Type	Capacity	Controls	Power Bowl Lift	Agitator Speeds (RPMs)		Attachment Speeds (RPMs)	
								First	Second	First	Second
SP62P-4 (1 Phase)	3 HP	220/60/1	18	Gear	60 qt / 57 liter	Digital, front mounted timer and controls	1/8 HP Motor	60	105	67	118
SP62P-4 (3 Phase)	3 HP	208/60/3	12	Gear	60 qt / 57 liter			Third	Fourth	Third	Fourth
								176	310	198	349

Cord & Plug: Attached 6-foot flexible 3-wire cord with molded plug fits a grounded receptacle. Single phase NEMA L6-30P Ⓢ Three phase NEMA L15-20P Ⓢ

**Specify voltage when ordering.*

DIMENSIONS | SHIPPING INFORMATION

Reinforced carton for shipping. The weight and dimensions of this reinforced carton are included below and may vary from shipment to shipment.

This product ships on a pallet. Freight class 85.

Model	Overall Dimensions	Net Weight	Shipping Dimensions	Shipping Weight
SP62P-4	30.25" W x 41.6" D x 60" H (76.83 cm x 105.66 cm x 152.4 cm)	980 lbs (444 kg)	48" W x 48" D x 76" H (122 cm x 122 cm x 193 cm)	1,228 lbs (556 kg)

Mixer is constructed of a rigid cast iron body with front-mounted controls, and 60-minute digital timer. Mixer has 3 HP custom built motor with overload protection and direct gear-driven, high torque permanently lubricated 4 speed transmission consisting of heat-treated hardened steel alloy gears and shafts. Mixer comes with 60 qt. stainless steel bowl, aluminum bowl truck and stainless steel wire whip, aluminum dough hook and non-slip rubber feet. Interlocked with stainless steel bowl guard with fully welded ingredient chute. Mixer has #12 attachment hub and interlocked power bowl lift. Mixer is NSF and ETL listed. Two-year parts and labor warranty.

OPTIONAL MIXER ACCESSORIES AND HUB ATTACHMENTS

MIXER:

- ☐ **XXSEISMIC KIT-LG** Seismic kit
- ☐ **XXBOWL-62** 60 qt. stainless steel (S/S) bowl
- ☐ **XXBEAT-62** Alum. flat beater
- ☐ **XXHOOK-62** Alum. dough hook
- ☐ **XXWHIP-62** S/S wire whip
- ☐ **XBTRUCK-62** Heavy-duty bowl truck

HUB:

- ☐ **XVSGH** 9" Slicer/Shredder/Grater housing only (no plates included-must select from plates listed on this sheet)
- ☐ **XASP** Adjustable slicing plate (for vegetables only)
- ☐ **XPH** Plate holder

- ☐ **L00670** Meat Tenderizer attachment
- ☐ **L00783** Strip Cutter attachment

Shredding Plates:

- ☐ **XSP332*** 3/32" (2.3 mm)
- ☐ **XSP316*** 3/16" (4.7 mm)
- ☐ **XSP14*** 1/4" (6.3 mm)
- ☐ **XSP516*** 5/16" (7.9 mm)
- ☐ **XSP12*** 1/2" (12.7 mm)
- ☐ **XGP*** Grating plate

**Only 1 plate holder required*

- ☐ **XMCA-SS** Meat grinder assembly (Polished stainless steel cylinder, worm gear, ring, and s/s pan. Includes knife, 3/16" plate, and pusher.)

- ☐ **XXCK** Chopper knife for XMCA-SS

Chopper Plate Sizes Available:

- ☐ **CP02-12** 1/16" (2 mm)
- ☐ **CP04-12** 5/32" (4 mm)
- ☐ **CP05-12** 3/16" (5 mm)
- ☐ **CP06-12** 1/4" (6 mm)
- ☐ **CP08-12** 5/16" (8 mm)
- ☐ **CP10-12** 3/8" (10 mm)
- ☐ **CP12-12** 1/2" (12 mm)
- ☐ **CP14-12** 9/16" (14 mm)
- ☐ **CP16-12** 5/8" (16 mm)
- ☐ **CP18-12** 11/16" (18 mm)
- ☐ **CP00-12** Stuffing plate

- ☐ **XST12** 1/2" Stuffing tube (mutton)
- ☐ **XST34** 3/4" Stuffing tube (pork)

- ☐ **FACTORY INSTALLED OPTION:**
XXCORR-62 Correctional package, includes tamper resistant external fasteners.

- ☐ **EXTENDED WARRANTY**
SP-XDSPL Extended warranty for SP62P mixer, extends factory warranty to 3-years. **Available only at time of purchase.**