



# IM-0460-22 Ice Cube Machine


## Models

- IM-0460-AC-22     IM-0460-AH-22



ICETRO IM-0460-22 ice machine on a IB-026-22 bin

\*Ice Machine and Bin sold separately

- Up to 443 lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- ENERGY STAR® qualified 
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Sides & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- Power cord with NEMA 5-15 plug
- R-404A refrigerant

## Ice Shape



**Half Cube**  
3/8" x 1 1/8" x 7/8"  
(.95 x 2.86 x 2.22 cm)



**Cube**  
7/8" x 7/8" x 7/8"  
(2.22 x 2.22 x 2.22 cm)

## Factory Warranty

Parts & Labor

**3** YR

Ice Maker

**5** YR

Evaporator

Parts

**5** YR

Compressor



Extend ice machine warranty 1 year by installing an IcePro 400 with ice machine.

\* Applies only to new ice machines, at the time of original installation & start-up.

## Specifications

### BTU Per Hour:

5,405

### Refrigerant:

R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

## Ice Machine Electric

115/60/1

### Minimum circuit ampacity:

Air-cooled: 15 *1ph*

### Maximum fuse size:

Air-cooled: 20 *1ph*

## Accessories

### Bin Adapter

IBT-2230B Center Mount 30" Bin\*  
IBT-2230BV Center Mount 30" Bin

\* Bins with S/N prior to VA/JJ

### Bin-Stat Kit

**IBO-150KIT**

Recommended when ice machine is installed on soda dispenser.



### Water Filtration

**IcePro 400**


Reduces sediment and chlorine contaminants with the use of Citrine.





# IM-0460-22 Ice Cube Machine

IM-0460-22 Air Cooled

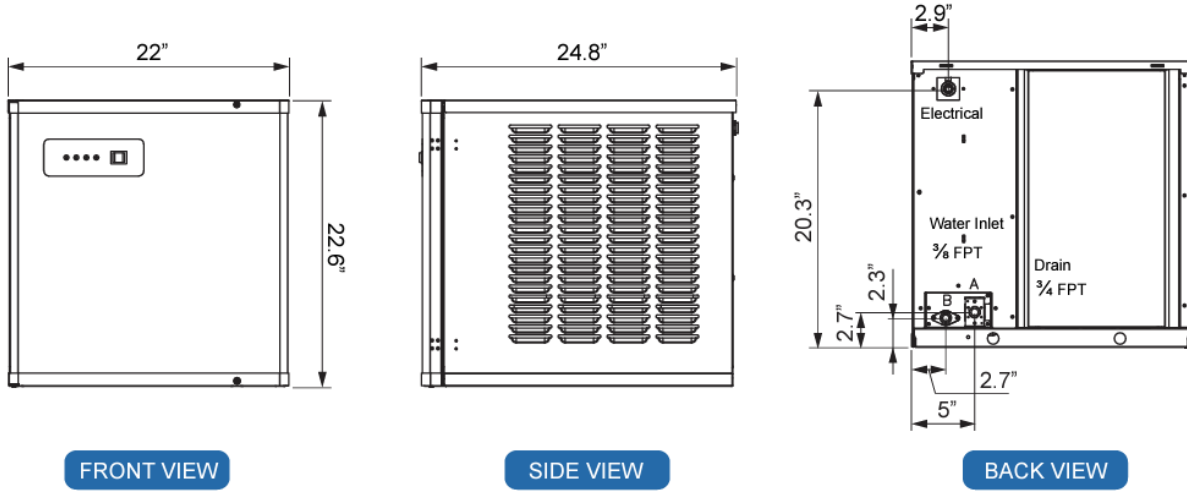

## Specifications

Dimensions	Width	Depth	Height	Weight
IM-0460-22 Machine	22"	24.8"	22.6"	143.3 lbs (Net) 168 lbs (Shipping)

Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
		70°Air/ 50°F Water	90°Air/ 70°F Water		
<b>AIR COOLED</b>	cube	1 ph	1 ph	1 Ph	
		443 lbs	367 lbs	6.21	18 Gal.
	half-cube	201 kgs	167 kgs		18 Gal.
		443 lbs	367 lbs	6.21	18 Gal.
		201 kgs	167 kgs		18 Gal.

