



ELECTRIC

ELECTRIC ROUNDTYPES | HOT PLATES 19-3/8" DEPTH

IMPERIAL



IHPA-3-36-E

Model Numbers

IHPA-1-12-E

IHPA-2-24-E

IHPA-3-36-E

IHPA-4-48-E

ROUND PLATE ELEMENTS

- 2.6 KW round plate elements with easy to clean flat surface.
- Provides a solid flat surface for fast, even heating.
- Plates are 9" (229) diameter for maximum pan contact.
- Solid top prevents spills from entering unit making clean-up easy.
- Infinite heat controls for maximum cooking flexibility.



9" (229 MM) SEALED ROUND PLATE ELEMENTS WITH EASY TO CLEAN FLAT SURFACE.

EXTERIOR FEATURES

- Stainless steel front, top and sides for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range match profile when placed on a refrigerated base or equipment stand.
- Large 5" (127 mm) stainless steel landing ledge is ideal for plating.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.






LARGE 5" (127 MM) STAINLESS STEEL LANDING LEDGE FOR CONVENIENT PLATING.

IMPERIAL




ELECTRIC

ELECTRIC ROUNDTYPES | HOT PLATES 19-3/8" DEPTH

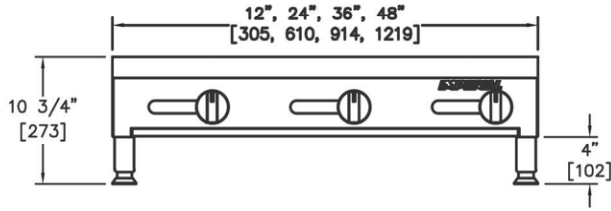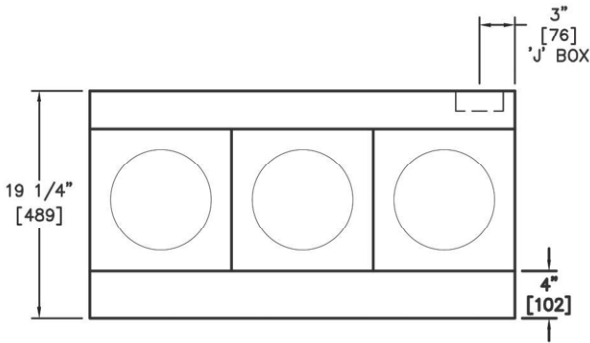

ELECTRIC HOT PLATES - 19-3/8" (492 MM) DEPTH

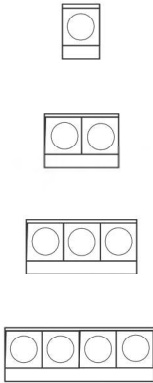

MODEL	WIDTH INCHES (MM)	ROUND ELEMENTS	OUTPUT KW	SHIP WEIGHT	
				KG	LBS
IHPA-1-12-E	12" (305)	1	2	21	45
IHPA-2-24-E	24" (610)	2	4	37	80
IHPA-3-36-E	36" (914)	3	6	53	115
IHPA-4-48-E	48" (1219)	4	8	64	140

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHPA-2-24-E	24" W X 19-3/8" D X 10-3/4" H (610 X 492 X 273 MM)	26-1/2" W X 23" D X 12" H (673 X 584 X 324 MM)
IHPA-3-36-E	36" W X 19-3/8" D X 10-3/4" H (914 X 492 X 273 MM)	38-1/2" W X 23" D X 12" H (965 X 584 X 324 MM)
IHPA-4-48-E	48" W X 19-3/8" D X 10-3/4" H (1219 X 492 X 273 MM)	50-1/2" W X 23" D X 12" H (1283 X 584 X 324 MM)

MODEL	AMPERAGE REQUIREMENTS			
	TOTAL KW	VOLTS	PH	AMPS
IHPA-1-12-E	2.6	208	1	13
	2.6	208	3	13
	2.6	240	1	11
	2.6	240	3	11
IHPA-2-24-E	2.6	480*	3	6
	5.2	208	1	25
	5.2	208	3	22
	5.2	240	1	22
IHPA-3-36-E	5.2	240	3	19
	5.2	480*	3	10
	7.8	208	1	38
	7.8	208	3	22
IHPA-4-48-E	7.8	240	1	33
	7.8	240	3	19
	7.8	480*	3	10
	10.4	208	1	50
IHPA-4-48-E	10.4	208	3	34
	10.4	240	1	44
	10.4	240	3	29
	10.4	480*	3	15

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 480 volts (additional charge)

