



# STEAM SHELL



SS-12 shown with optional Griddle

SS-12

## STANDARD FEATURES

- Stainless steel top, front, and sides
- 12" wide electric modular unit
- One 3.2 kW heating element
- 3/8" thick cast aluminum platen for fast temperature recovery
- 10.75" x 23" deep cooking surface
- 8" vertical travel – no platen adjustment needed for product thickness
- One-hand mechanical tilt mechanism with lock
- Audible alarm signals when product is ready
- Thermostat adjustable from 200°F to 450°F
- Patented moisture-locking removable gasket included
- 8 ft. cord with plug for quick connection
- Teflon release liner and mounting kit included
- Available in 208V or 240V, 50/60Hz, single phase
- (1) year limited parts and labor warranty (reference <https://southbendnc.com/service-and-parts> for limited warranty details)

## Available Controls

- Programmable temperature controller and timer (up to 3 settings)

## OPTIONS & ACCESSORIES AT ADDITIONAL COST

- Factory-mount steam shell to griddle.
- Additional Teflon release liners
- Additional Moisture Locking gasket

## COMPATIBLE GRIDDLE MODELS

- HDG - 24
- HDG - 36
- HDG - 48
- HDG - 60
- HDG - 72

**NOTE:** Griddles are sold separately

## STANDARD CONSTRUCTION SPECIFICATIONS

**Exterior Finish:** Front, top, sides and tower are constructed of #3 polished 430 stainless steel.

**Platen:** 10-3/4" wide by 23" deep; 3/8" Thick Cast Aluminum platen heated by 3.2 kW heating element for fast recovery.

**Control:** Programmable thermostat with timer allows for precise temperature control. Thermostat adjustment from 200°F - 450°F.

## CLEARANCE

All clearances are determined by the HDG griddle requirements

## ELECTRICAL REQUIREMENTS


| MODEL | TOTAL kW | VOLTAGE | PHASE | AMPS |
|-------|----------|---------|-------|------|
| SS-12 | 3.2      | 208 VAC | 1     | 15.5 |
| SS-12 | 3.2      | 240VAC  | 1     | 13.5 |




Approval Notes: \_\_\_\_\_

\_\_\_\_\_


Dimensions shown in inches and (millimeters)

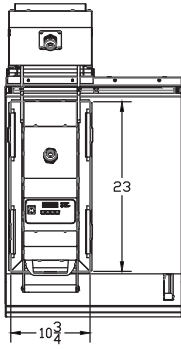


TOP VIEW

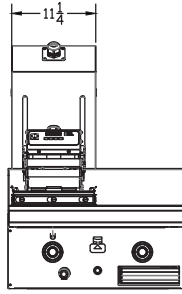


FRONT VIEW : DOWN

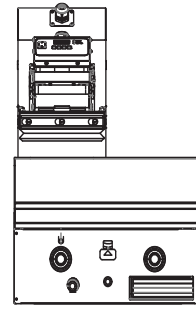


FRONT VIEW : UP

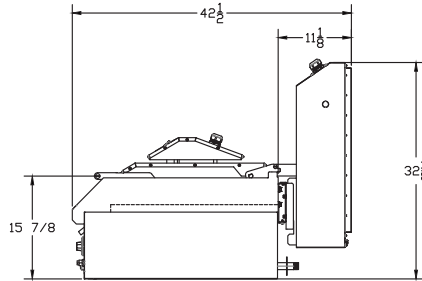

SIDE VIEW : DOWN

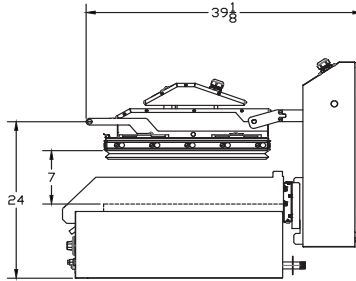

SIDE VIEW : UP

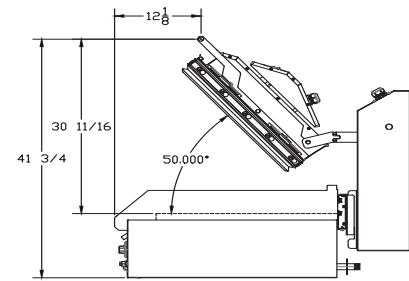

SIDE VIEW : TILTED

**DIMENSIONS**

| MODEL | WEIGHT                 |
|-------|------------------------|
| SS-12 | 150 lbs<br>(68.04 kg.) |

**MISCELLANEOUS**

- Check local code for fire and sanitation regulations.

**NOTICE:**

Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

**INTENDED FOR COMMERCIAL USE ONLY.  
NOT FOR HOUSEHOLD USE.**

